

Professional lighting



地址：台州市椒江区椒北大道2323号(章安街道建设村)

Add: NO: 2323, Jiaobei Road, Jiaojiang Area, Taizhou City, Zhejiang, China


电话: 86-576-88221032 传真: 86-576-88800058

Fel: 86-576-88221032 Fax: 86-576-88800058

Http://www.chinatqds.com



天桥灯饰
TIANQIAO LIGHTING

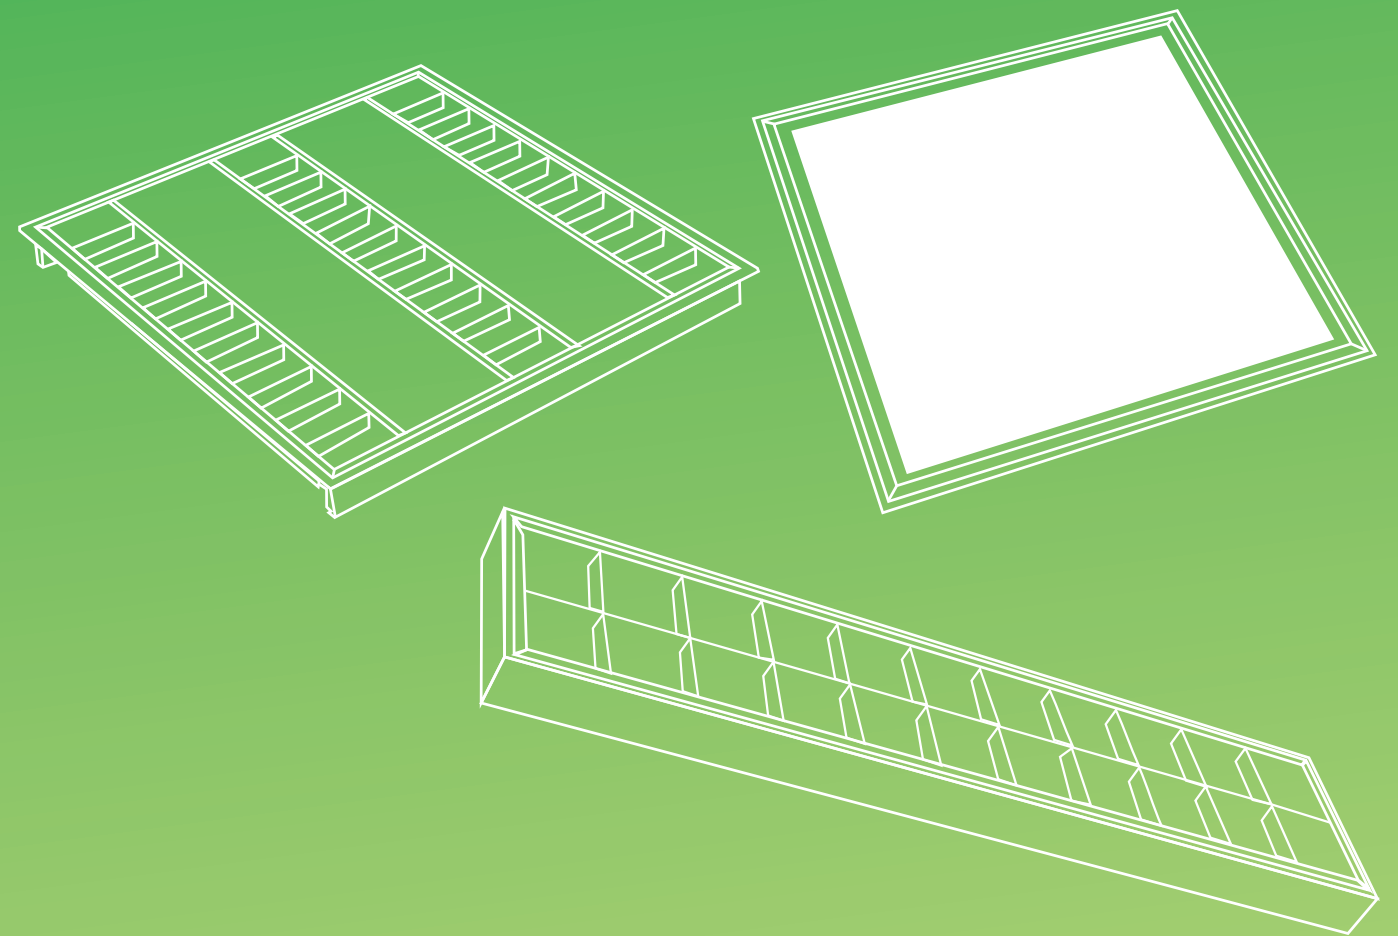

TAIZHOU TIANQIAO LIGHTING CO.,LTD



I 公司简介

台州市天桥灯饰有限公司位于交通便利的浙江台州市，本公司成立于1991年，是一家专业从事开发、设计、生产格栅灯具的公司，其中还包括铁皮支架灯、壁灯、三防灯等。在过去的20年中， 在过去20年中，本公司不断引进先进技术，努力创新。专业的技术、先进的工艺、熟练的员工为本公司产品创造了外形独特、性能高效、低维护、高品质的特点。产品全面通过CCC、CE、ROHS质量认证。企业自主开发设计的多项产品已获国家外观专利产品。可用于各种照明环境和特殊场合。

其次，为掌握国际先进技术和咨询，公司一直与海外市场保存密切合作。因此本公司灯具以优良的质量、实惠的价格畅销亚洲、北美洲和南美洲，并受到当地市场的欢迎。再次，公司以高品质的产品和优秀的服务得到海外客户的好评。为满足客户的特殊要求，我们可根据客户样品或特殊要求生产加工。

公司宗旨是追求欧美质量标准，打造中国成本价格，您的满意就是我们奋斗的目标！

I Brief introduction

TaiZhou TianQiaoLighting Co.,LTD is located in TaiZhou City of ZheJiang Province .where is close to ningbo city .It costs 45 minutes by train from ningbo East station .

We are a professional manufacturer in researing producing and exporting louver fittings water proof,LED light since 1991. Our fixtures are selling well and popular in Euro SouthAmerica and SouthAfrica with CE ROHS GS certificates.

We have rich experience in OEM for famous international brand.Meanwhile we helped many customers develope special design freely .

After 23 years developing and growing we are sucessful in getting and advantage compare with same industrial .Variety of styles or customization their design flexibly. Unique technology make fixtures much more exguisite in details .moreover advanced equipment and experienced workers is the guarantee for high quality and effeciency.

TianQiao is very strict in raw material inspection .we selected superior raw material .the steel is high quality original cold-rolled steel sheet .and the UV-proof white powder have passed ROHS to meet EU standard .The main reflector are selected with high brightness and reflective chinese aluminum or anodized aluminum. And even better the components with CE VDE ROHS .

Much more information welcome to contact with us by calling or Email .we are looking forward to establish business relationship with interested customers .

企业荣誉 Credentials



天桥灯饰

TIANQIAO LIGHTING




目 录 (CATALOGUE)

LED平板灯系列	
LED flat panel light	1-6
T5 格栅灯系列	
T5 Louver Fitting Series.....	7-13
T8 格栅灯系列	
T8 Louver Fitting Series	14-22
节能格栅灯系列	
Energy-Saving Louver Fitting Series.....	23-26
侧入式LED平板灯系列	
LED panel light series with smd and guide light plate	27-30
间接照明系列	
Indirect Lighting Series.....	31
胶片灯系列	
Opal/Prismatic Cover Series.....	32-33
净化灯系列2-	
Clean Lamp Series.....	34
三防灯系列	
Water-Proof Fixture Series.....	35-38
壁灯系列	
Wall Lamp Series.....	39-40
T8 T5 支架灯系列	
T8 T5 Batten Fixtures Series.....	41-48



天桥灯饰

TIANQIAO LIGHTING

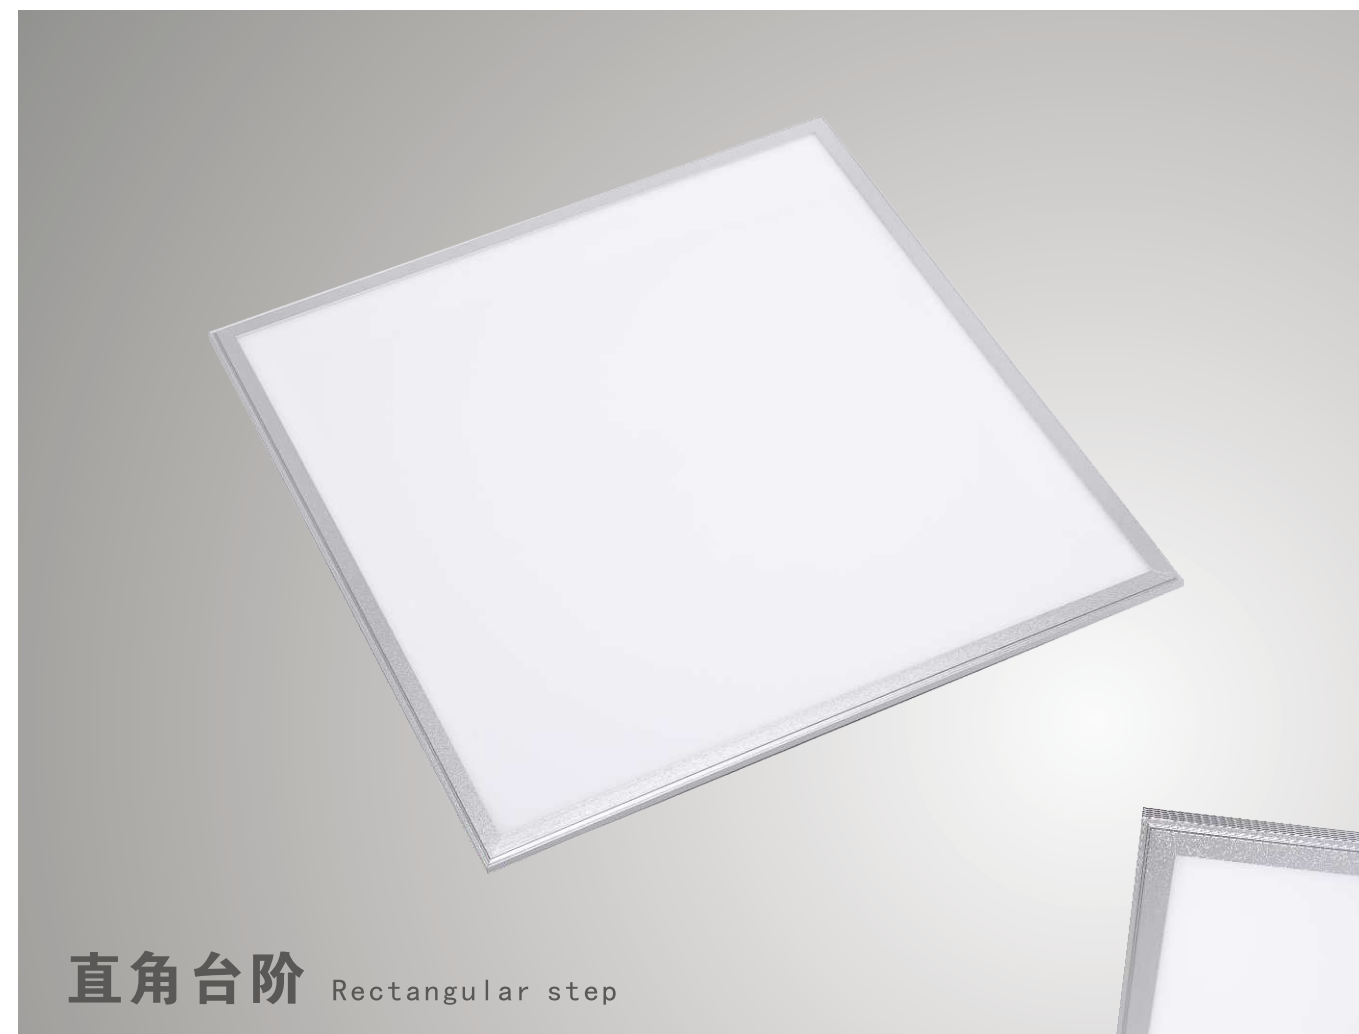LED平板灯系列
LED FLAT PANEL LIGHT

直角台阶 Rectangular step

Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application: office, meeting room, waiting hall, department store, supermarket, school, and showroom.

LED平板灯系列

LED FLAT PANEL LIGHT



超薄台阶

Ultra-thin stage


Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(A)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230(A)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(A)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060(A)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(A)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030(A)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(A)	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

LED平板灯系列

LED FLAT PANEL LIGHT

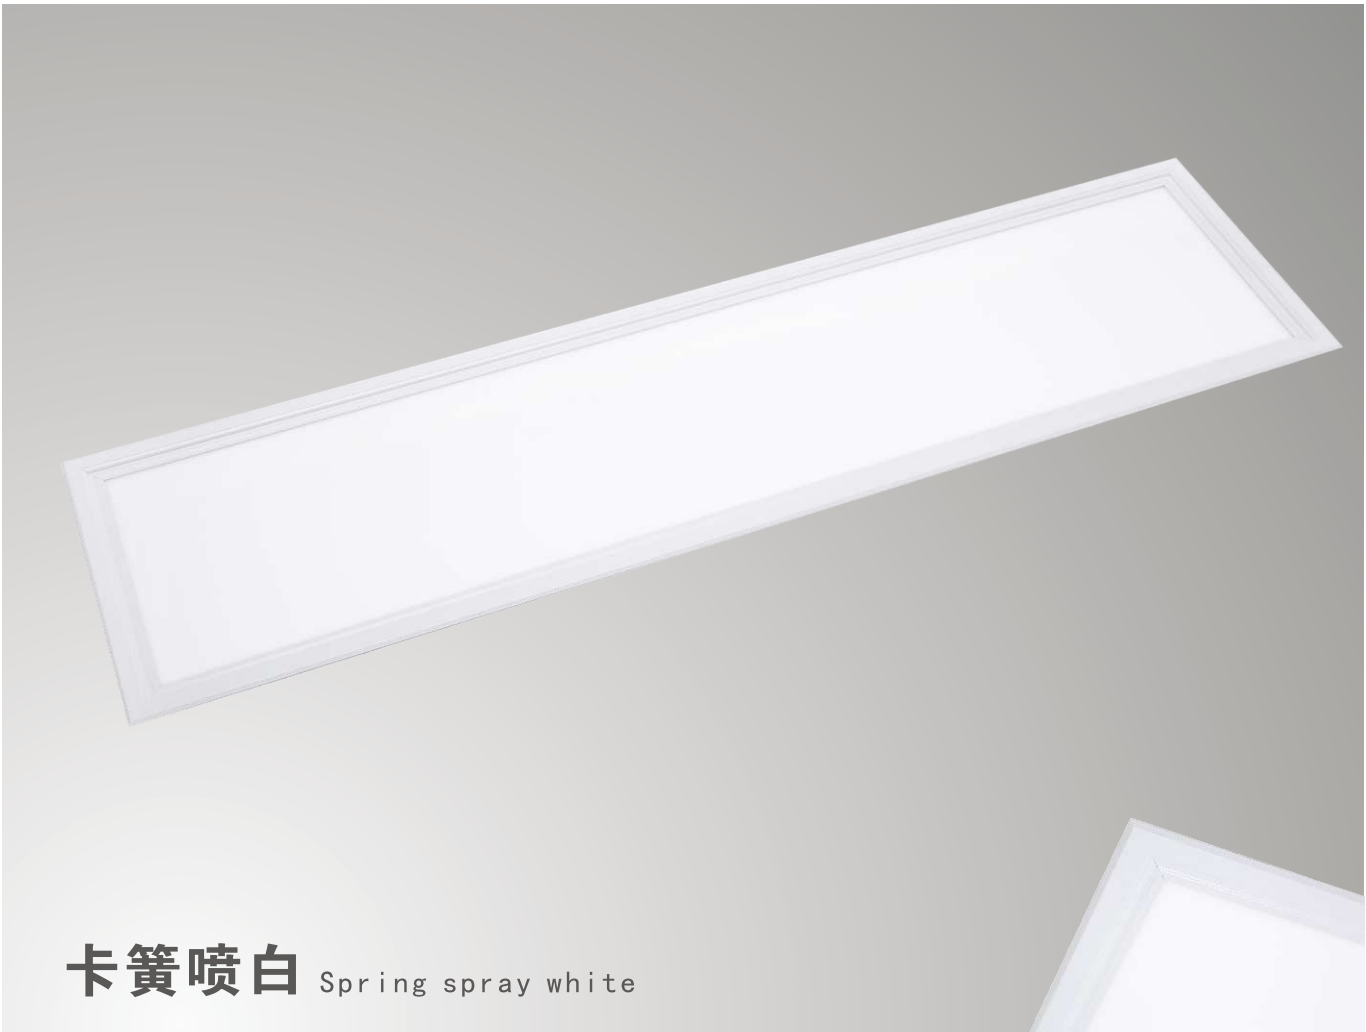

卡簧喷白

Spring spray white


Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(B)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230(B)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(B)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060(B)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(B)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030(B)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(B)	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

LED平板灯系列

LED FLAT PANEL LIGHT

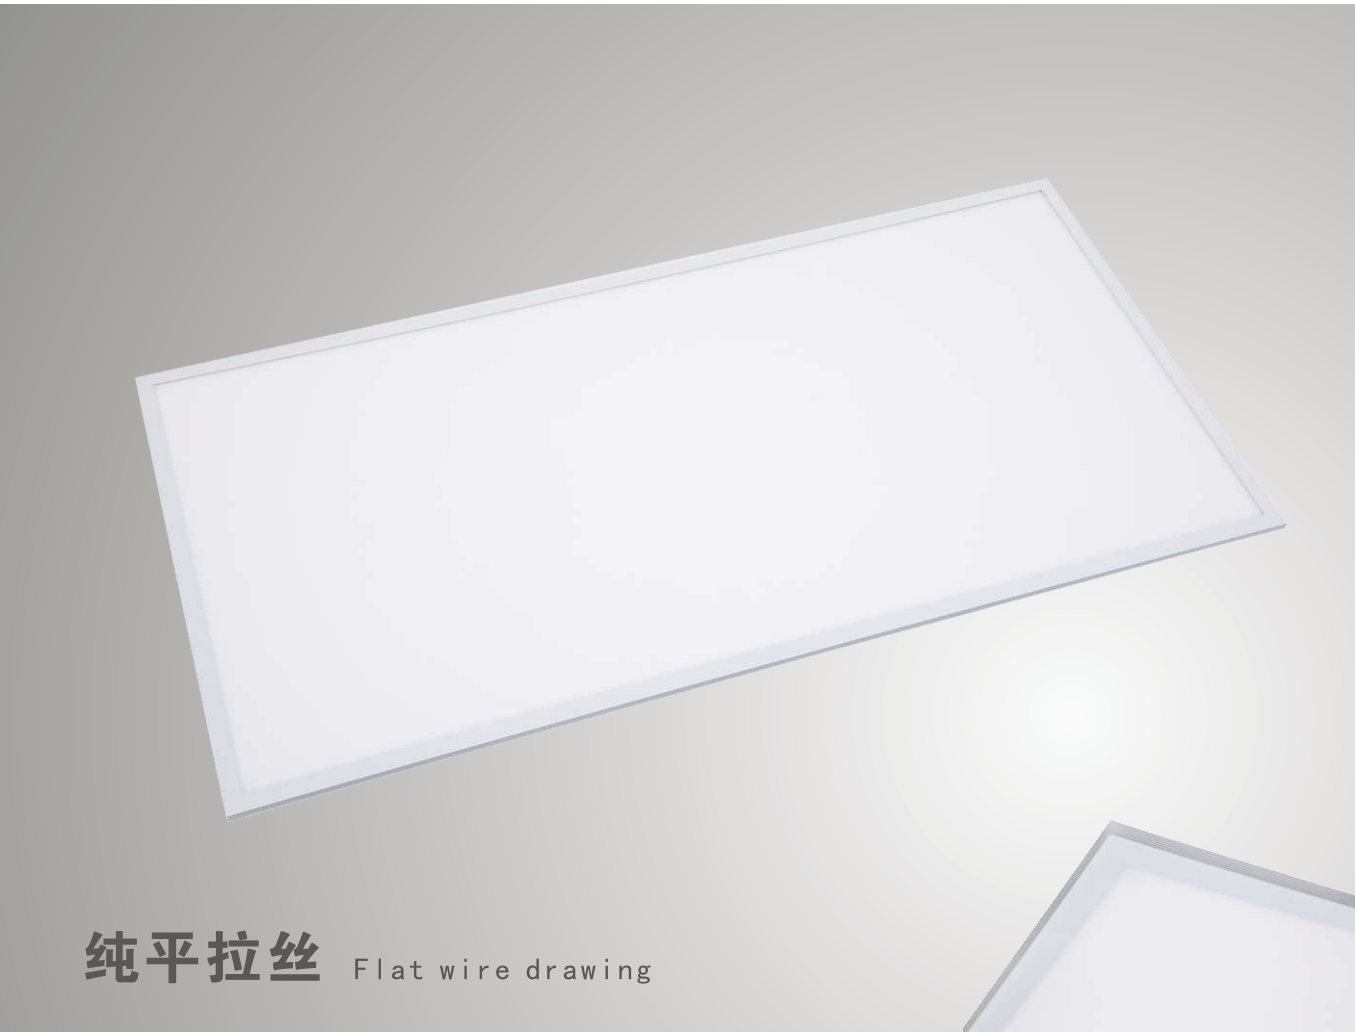

纯平拉丝

Flat wire drawing


Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(c)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230(c)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(c)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060(c)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(c)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030(c)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(c)	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application:office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

LED平板灯系列

LED FLAT PANEL LIGHT

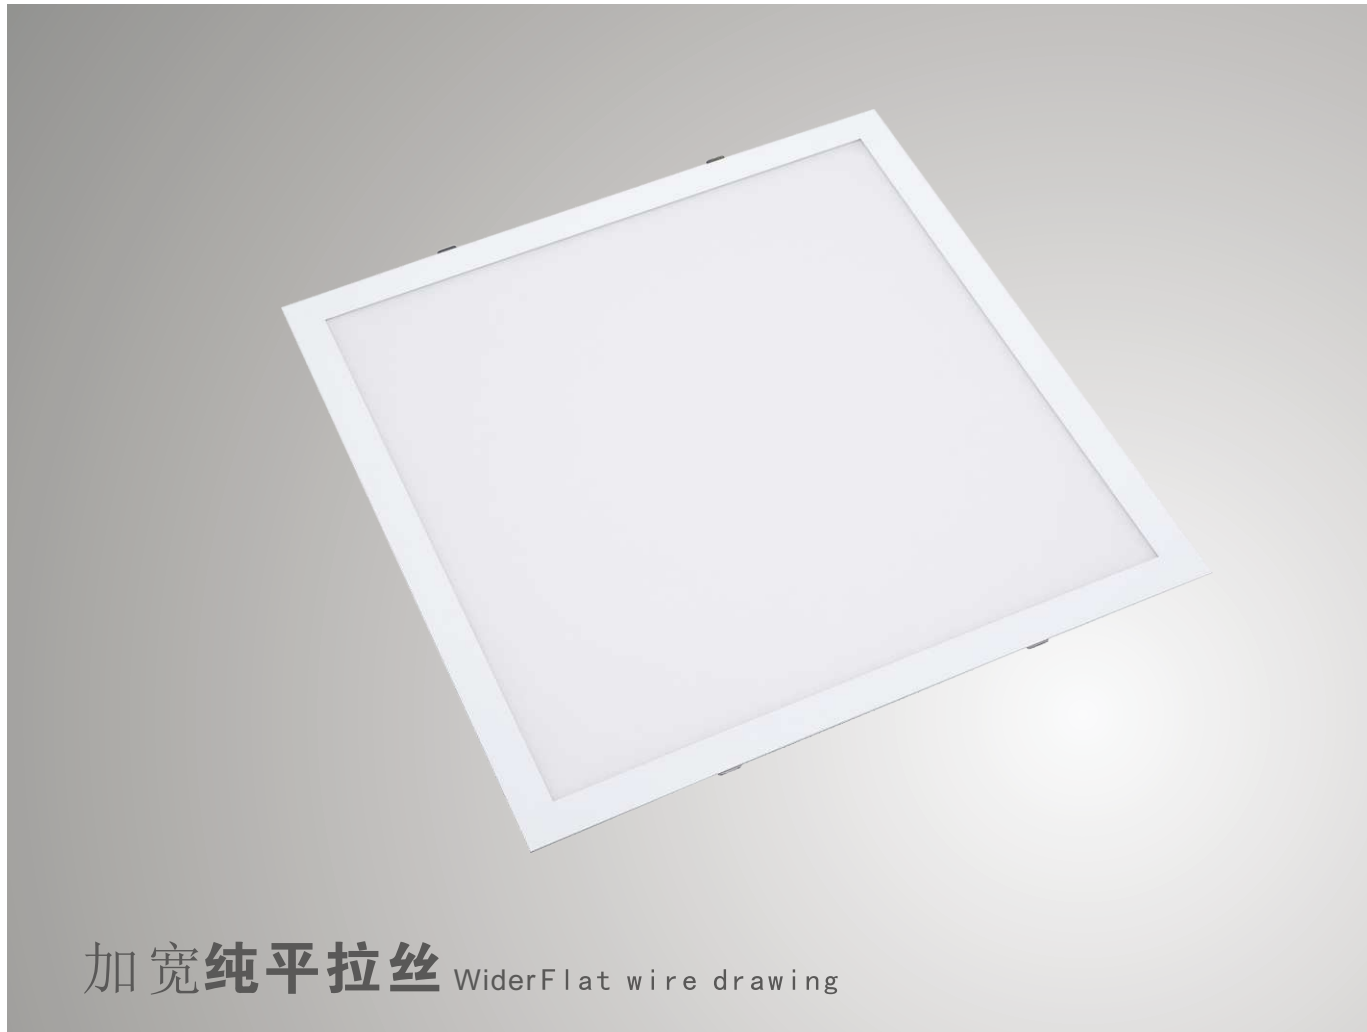

加宽纯平拉丝


WiderFlat wire drawing

Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(D)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	W620xL1220xH12	RECESSED/CEILING 嵌入/明装
TQPL-1230(D)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W320xL1220xH12	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(D)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W320xL1220xH12	RECESSED/CEILING 嵌入/明装
TQPL-6060(D)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W620xL620xH12	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(D)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W620xL620xH12	RECESSED/CEILING 嵌入/明装
TQPL-6030(D)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	W320xL620xH12	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(D)	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	W320xL620xH12	RECESSED/CEILING 嵌入/明装

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application:office, meeting room, waiting hall, department store, supermarket, shool, and showroom.


LED平板灯系列
LED FLAT PANEL LIGHT

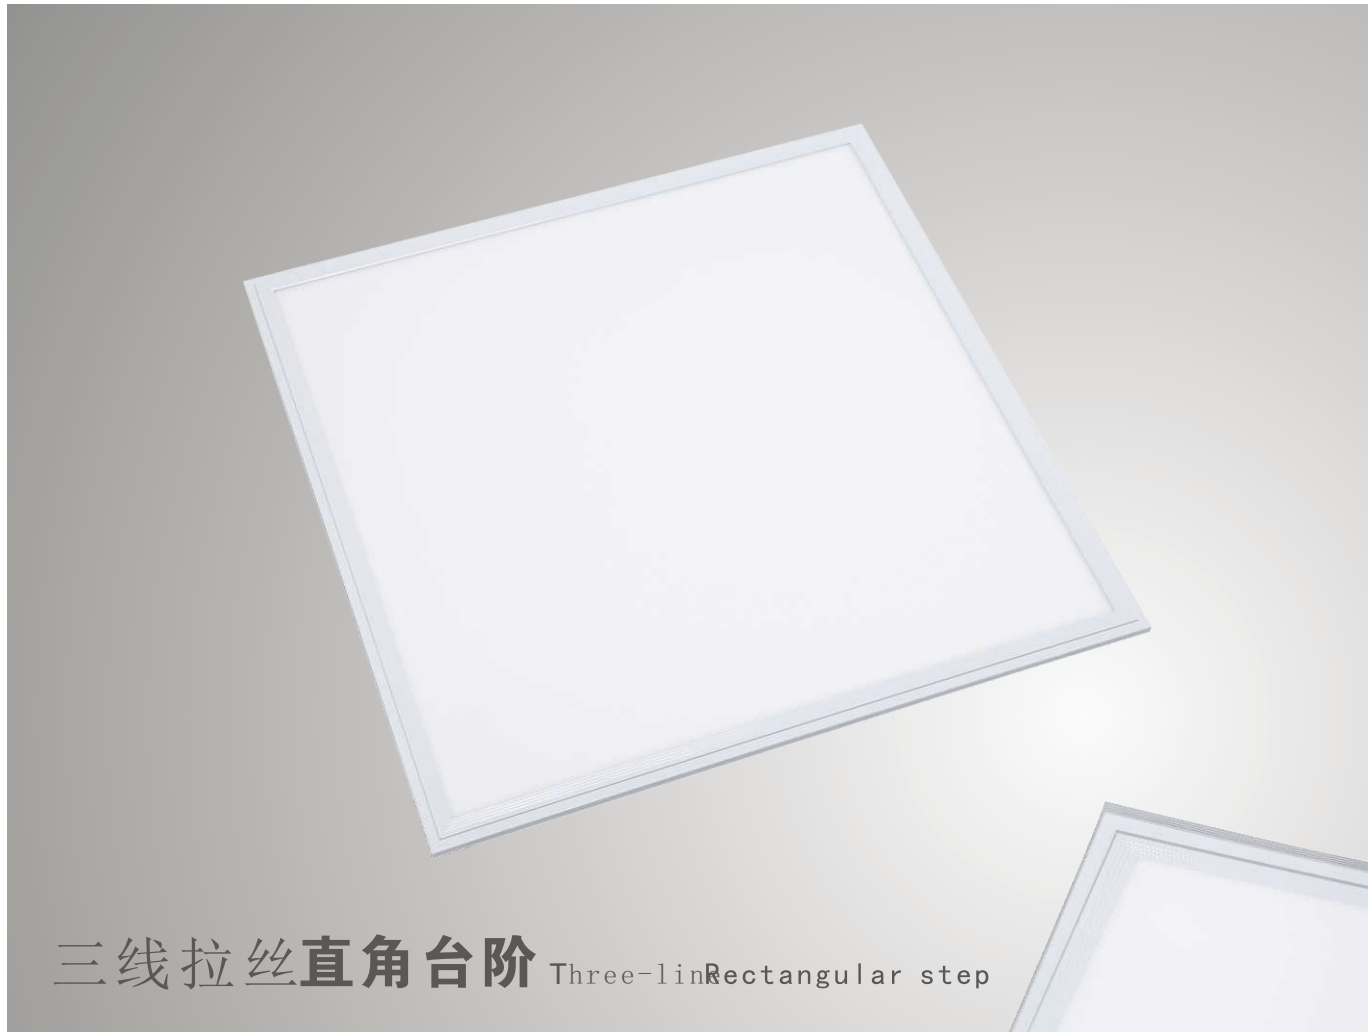

Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(E)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230(E)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(E)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060(E)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(E)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	W595xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030(E)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(E)	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	W295xL595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室,会议室,候机室,商场,超市,学校,展厅等
Main application:office, meeting room, waiting hall, department store, supermarket, shool, and showroom.


LED平板灯系列
LED FLAT PANEL LIGHT

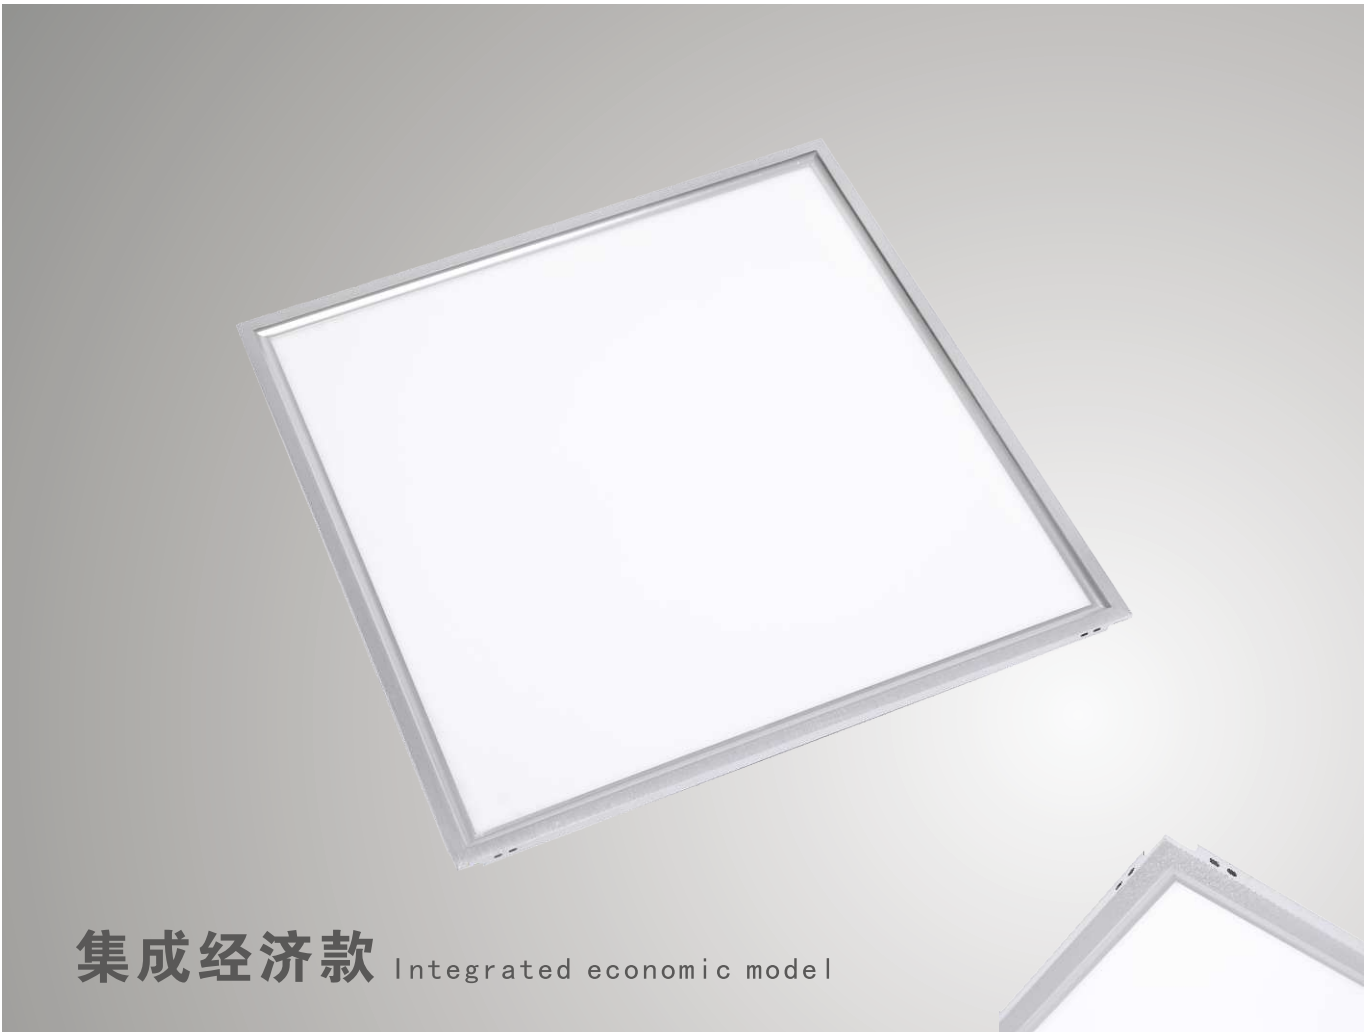

Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(F)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	L595xW1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230(F)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(F)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060(F)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	L595xW595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(F)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	L595xW595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030(F)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(F)	AC85-265V	22W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室,会议室,候机室,商场,超市,学校,展厅等
Main application:office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

LED平板灯系列
LED FLAT PANEL LIGHT

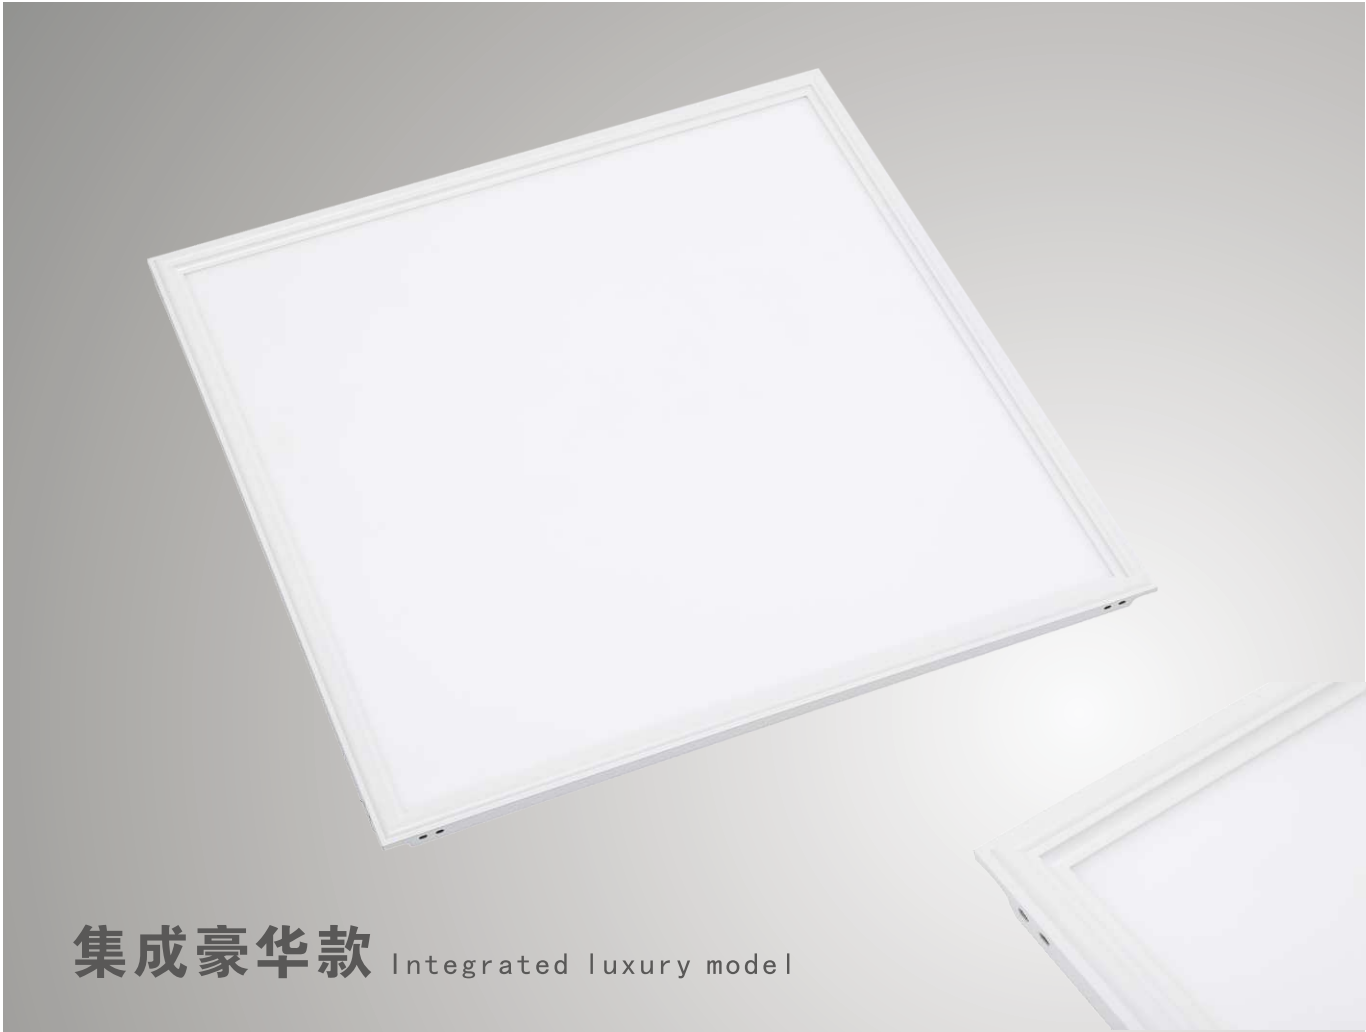


集成豪华款 Integrated luxury model

Model 型号	Input Voltage 输入电压	Power 功率	Light Efficiency 发光效率	Power factor 功率因素	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
TQPL-1260(G)	AC85-265V	65W	≥90 LM/W	>0.90	≥80	2700-7000K	L595xW1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230(G)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-1230-1(G)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW1195xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060(G)	AC85-265V	40W	≥90 LM/W	>0.90	≥80	2700-7000K	L595xW595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6060-1(G)	AC85-265V	45W	≥90 LM/W	>0.90	≥80	2700-7000K	L595xW595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030(G)	AC85-265V	18W	≥90 LM/W	>0.90	≥80	2700-7000K	L295xW595xH10.5	RECESSED/CEILING 嵌入/明装
TQPL-6030-1(G)	AC85-265V	22W	≥90 LM/W	>0.90	≥80		L295xW595xH10.5	RECESSED/CEILING 嵌入/明装

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等
Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

LED嵌入式灯盘
LED PANEL LIGHT

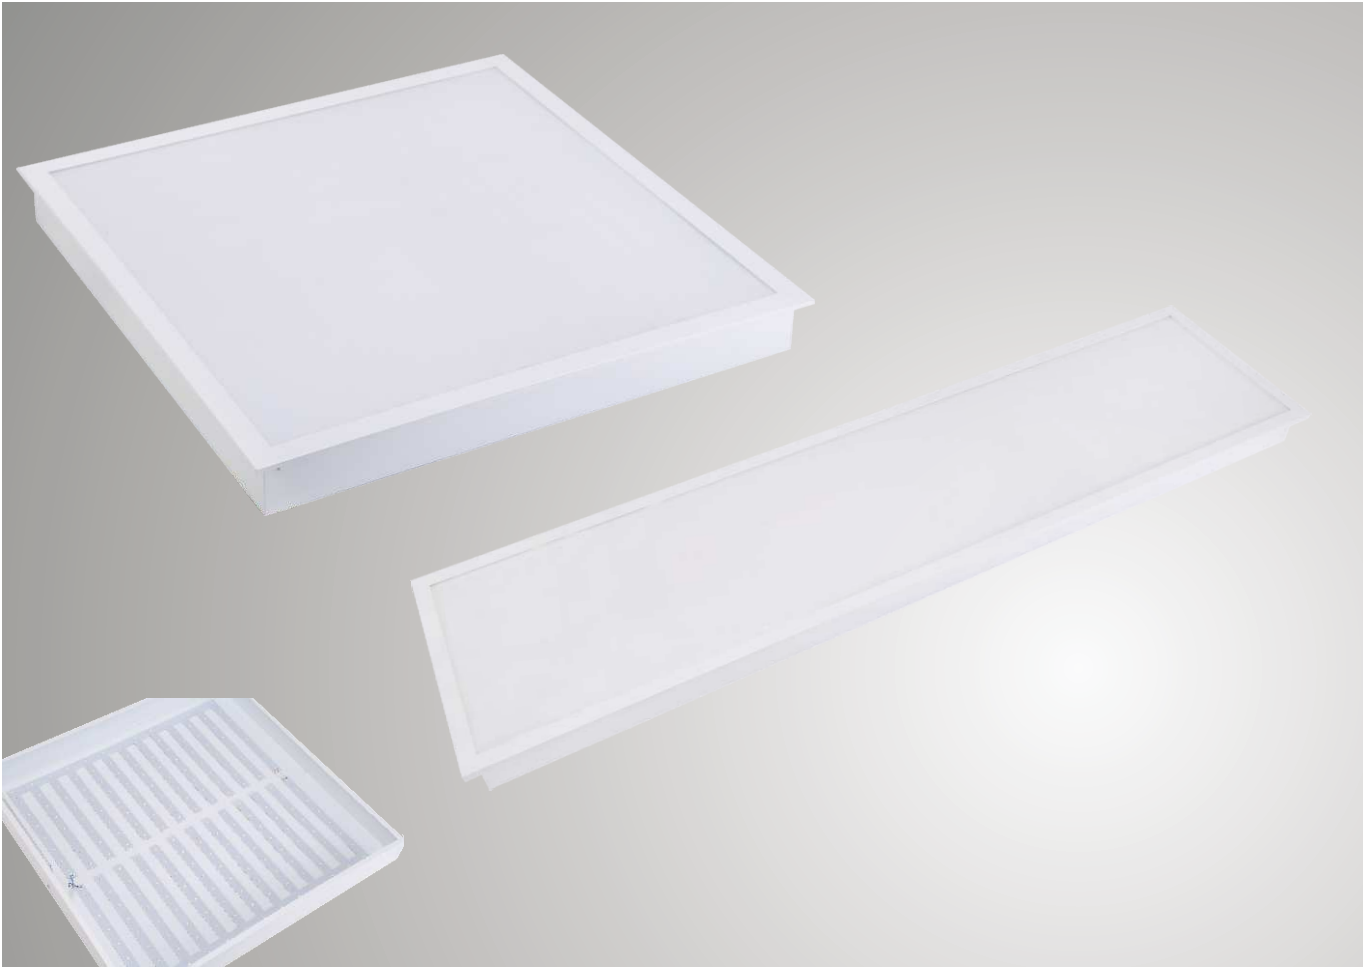

型号 Model	灯珠 SMD	功率 POWER	显色指数 CRI	光效 LM	光通量 LUMINOUS FLUX	尺寸 SIZE
TQGL 600	2835	45W	≥80	≥90lm	3900-4500lm	L595xW595xH65
TQGL 600	2835	40W	≥80	≥90lm	3500-4000lm	L595xW595xH65
TQGL 600	2835	36W	≥80	≥90lm	3200-3600lm	L595xW595xH65

型号 Model	灯珠 SMD	功率 POWER	显色指数 CRI	光效 LM	光通量 LUMINOUS FLUX	尺寸 SIZE
TQGL 1200	2835	45W	≥80	≥90lm	3900-4500lm	L295xW1195xH65
TQGL 1200	2835	40W	≥80	≥90lm	3500-4000lm	L295xW1195xH65
TQGL 1200	2835	36W	≥80	≥90lm	3200-3600lm	L295xW1195xH65

型号 Model	灯珠 SMD	功率 POWER	显色指数 CRI	光效 LM	光通量 LUMINOUS FLUX	尺寸 SIZE
TQGL 300	2835	24W	≥80	≥90lm	2000-2400	L295xW595xH65
TQGL 300	2835	18W	≥80	≥90lm	1500-1800	L295xW595xH65




*Driver outside



*Driver inside

紧凑形面板灯

ROUND LED PANEL LAMP (recessed/ceiling)

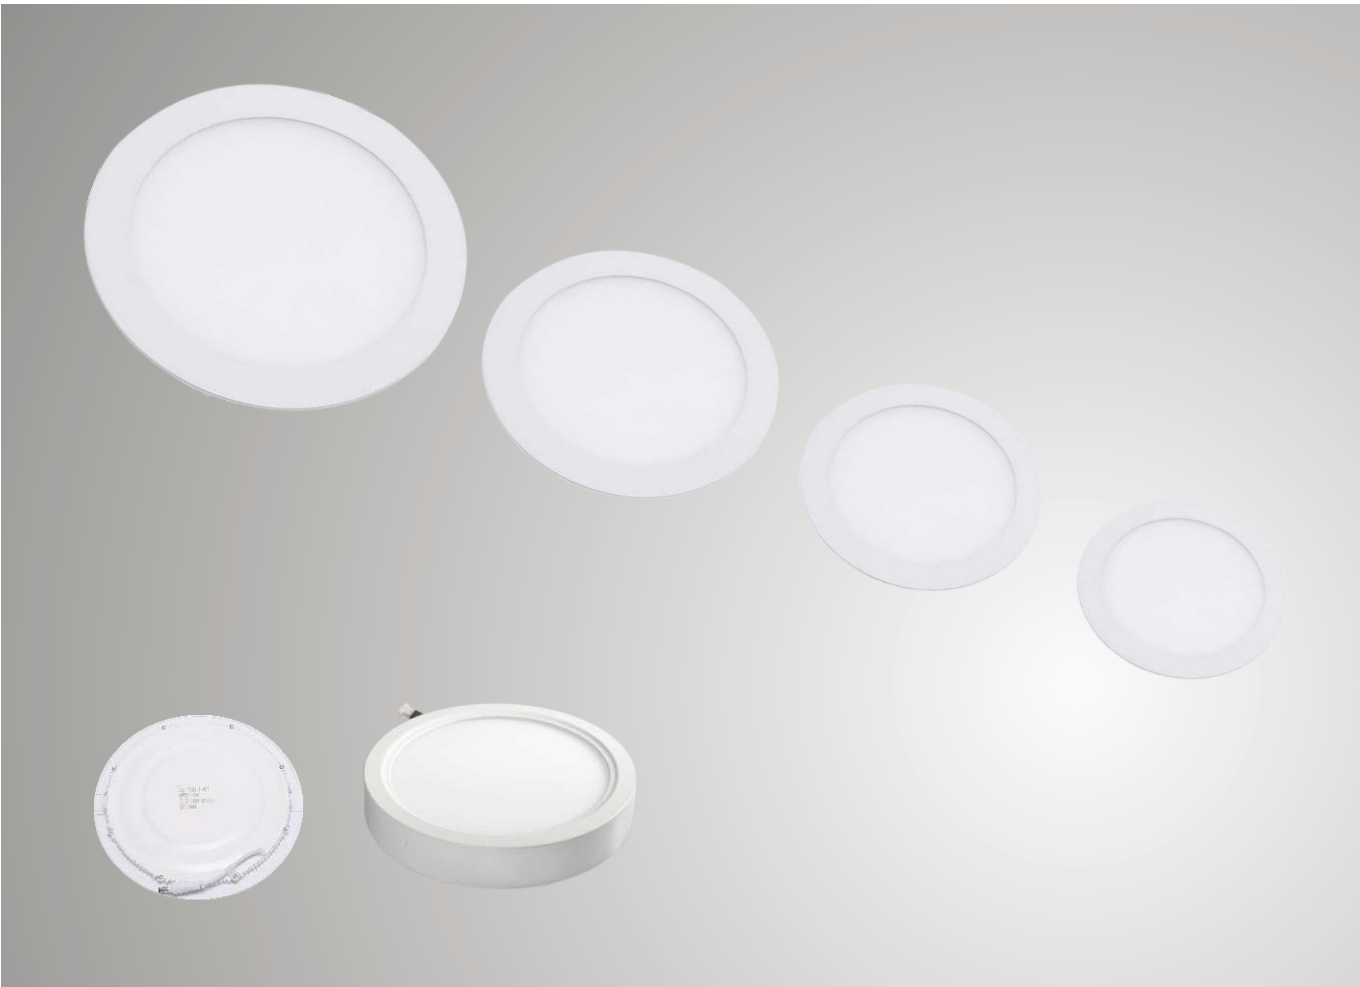


Model 型号	Power 功率	LM 光通量	Dimension (mm) 尺寸	Hole size (mm) 孔	Voltage 电压	SMD 贴片	LED QTY 数量	IC Driver 驱动	PF 功率因数	Light Angle 发光角度	CIR 显色指数	CCT 色温	life hours 寿命	PCS/CTN 包装数量	Packing 包装尺寸
TQPL-3W-R	3W	160-200	φ85*13	70	110-240V	SANAN 2835	15	IC Driver CE/EMC 35000hours	0.95	120°	≥80	2700-7000k	35000H	50PCS	55*28*17.5CM
TQPL-6W-R	6W	350-400	φ115*13	110			30							20PCS	34*28*17.5CM
TQPL-9W-R	9W	600-650	φ145*13	135			45							20PCS	40*34*17.5CM
TQPL-12W-R	12W	850-900	φ170*13	160			60							20PCS	44*39*17.5CM
TQPL-15W-R	15W	1050-1100	φ192*13	180			75							20PCS	50*44*17.5CM
TQPL-18W-R	18W	1200-1300	φ225*13	210			90							20PCS	56*48*17.5CM
TQPL-24W-R	24W	1700-1800	φ298*13	280			120							10PCS	34*33*37CM

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application:office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

紧凑形面板灯

SQUARE LED PANEL LAMP (recessed/ceiling)

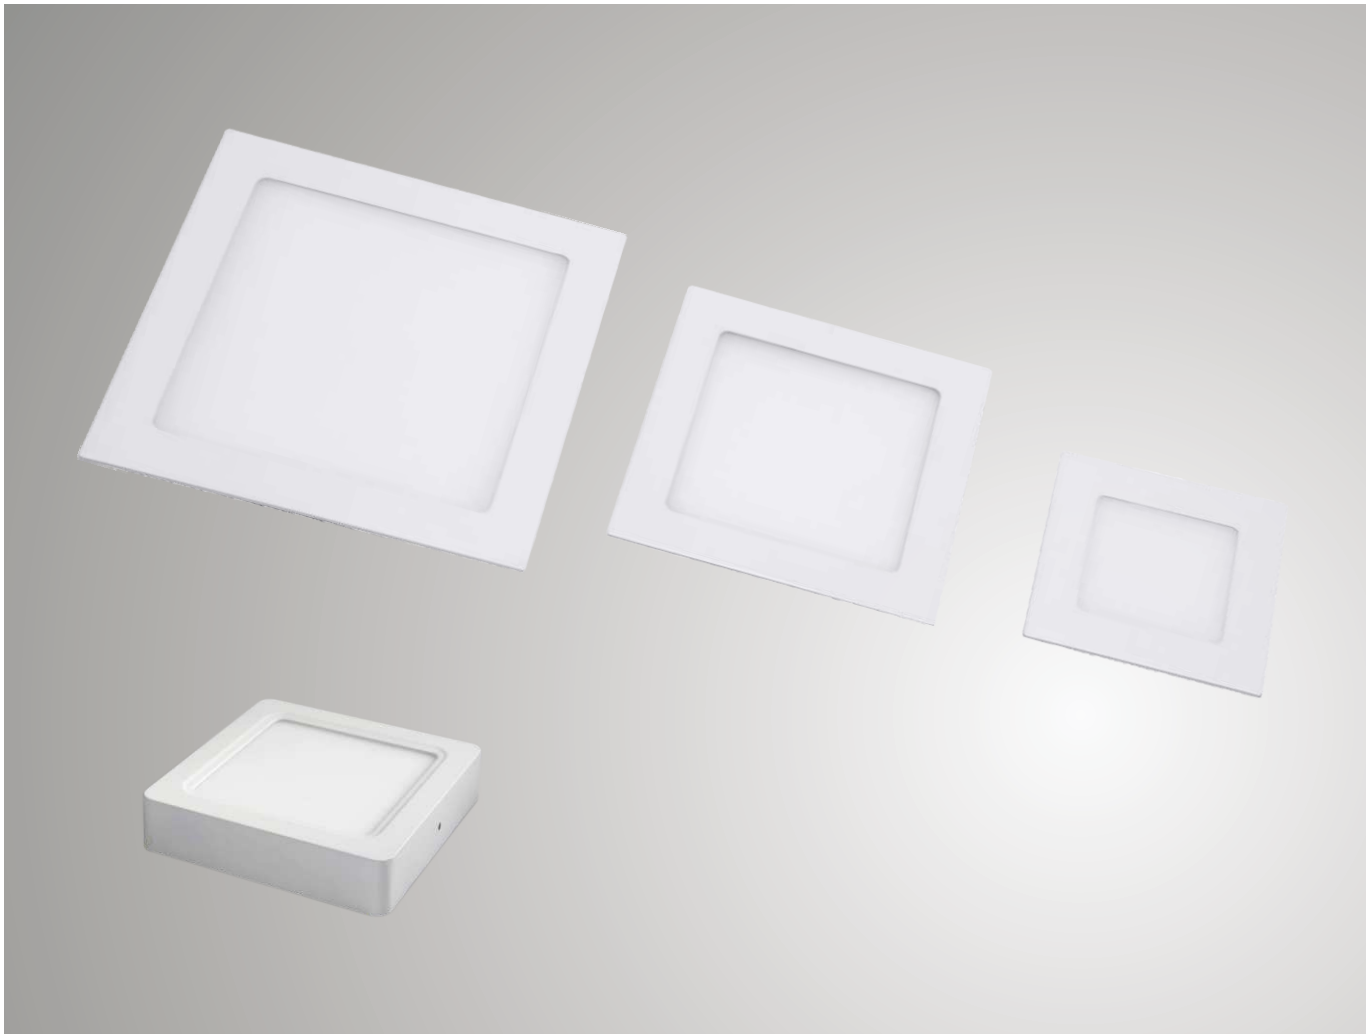

Model 型号	Power 功率	LM 光通量	Dimension (mm) 尺寸	Hole size (mm) 孔	Voltage 电压	SMD 贴片	LED QTY 数量	IC Driver 驱动	PF 功率因数	Light Angle 发光角度	CIR 显色指数	CCT 色温	life hours 寿命	PCS/CTN 包装数量	Packing 包装尺寸
TQPL-3W-S	3W	160-200	85*85*13	70	110-240v	SANAN 2835	15	IC Driver CE/EMC 35000hours	0.95	120°	≥80	2700-7000k	35000H	50PCS	55*28*17.5CM
TQPL-6W-S	6W	350-400	115*115*13	110			30							20PCS	34*28*17.5CM
TQPL-9W-S	9W	600-650	145*145*13	135			45							20PCS	40*34*17.5CM
TQPL-12W-S	12W	850-900	170*170*13	160			60							20PCS	44*39*17.5CM
TQPL-15W-S	15W	1050-1100	195*195*13	180			75							20PCS	50*44*17.5CM
TQPL-18W-S	18W	1200-1300	225*225*13	210			90							20PCS	56*48*17.5CM
TQPL-24W-S	24W	1700-1800	300*300*13	280			120							10PCS	34*33*37CM

适合场所:办公室, 会议室, 候机室, 商场, 超市, 学校, 展厅等

Main application:office, meeting room, waiting hall, department store, supermarket, shool, and showroom.



T5 嵌入式荧光格栅灯

T5 RECESSED LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQT5214	2x14W	595X295X70	610X310X160	2
TQT5314	3x14W	595X595X70	610X610X160	2
TQT5414	4X14W	595X595X70	610X610X160	2
TQT5228	2x28W	1195X295X70	1210X310X160	2
TQT5328	3x28W	1195X595X70	1210X610X160	2
TQT5428	4x28W	1195X595X70	1210X610X160	2
TQT5235	2x35W	1495X295X70	1510X310X160	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.
Installation: Recessed and ceiling mounted with chain and line.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm


Lampholder quality for option
PC/ABS lampholder

Cable material for option
Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

T5 嵌入式荧光格栅灯

T5 RECESSED LOUVER FITTING

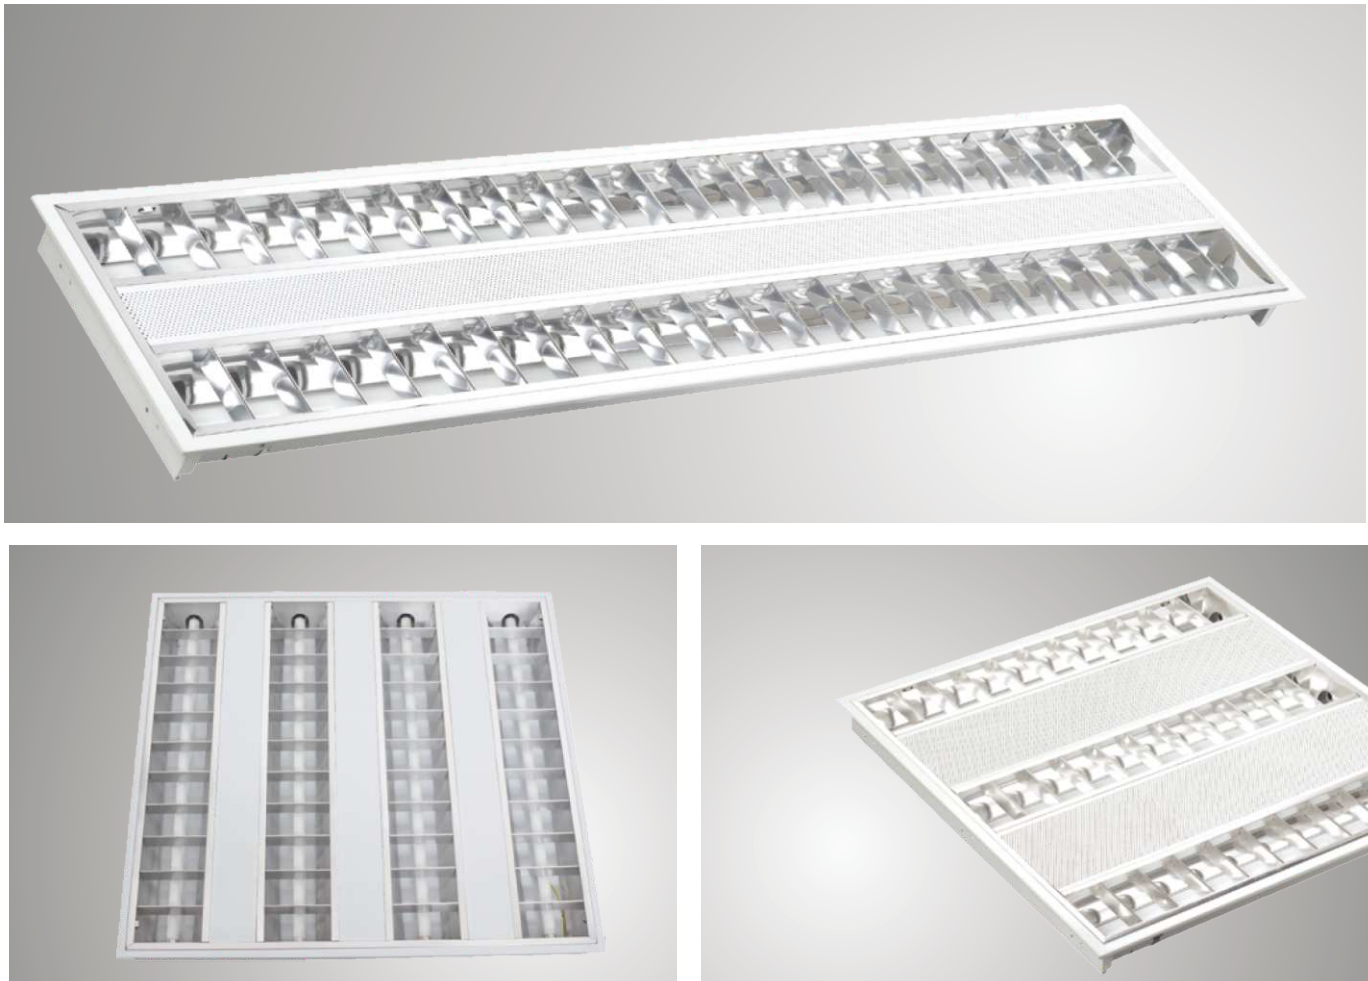

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQT5214(A)	2x14W	595X295X55	610X310X130	2
TQT5314(A)	3x14W	595X595X55	610X610X130	2
TQT5414(A)	4X14W	595X595X55	610X610X130	2
TQT5228(A)	2x28W	1195X295x55	1210X310X130	2
TQT5328(A)	3x28W	1195X595X55	1210X610X130	2
TQT5428(A)	4x28W	1195X595X55	1210X610X130	2
TQT5235(A)	2x35W	1495X295X55	1510X310X130	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

Installation: Recessed and ceiling mounted with chain and line.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm

Lampholder quality for option

PC/ABS lampholder


Cable material for option

Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

LED嵌入式格栅灯

LED RECESSED

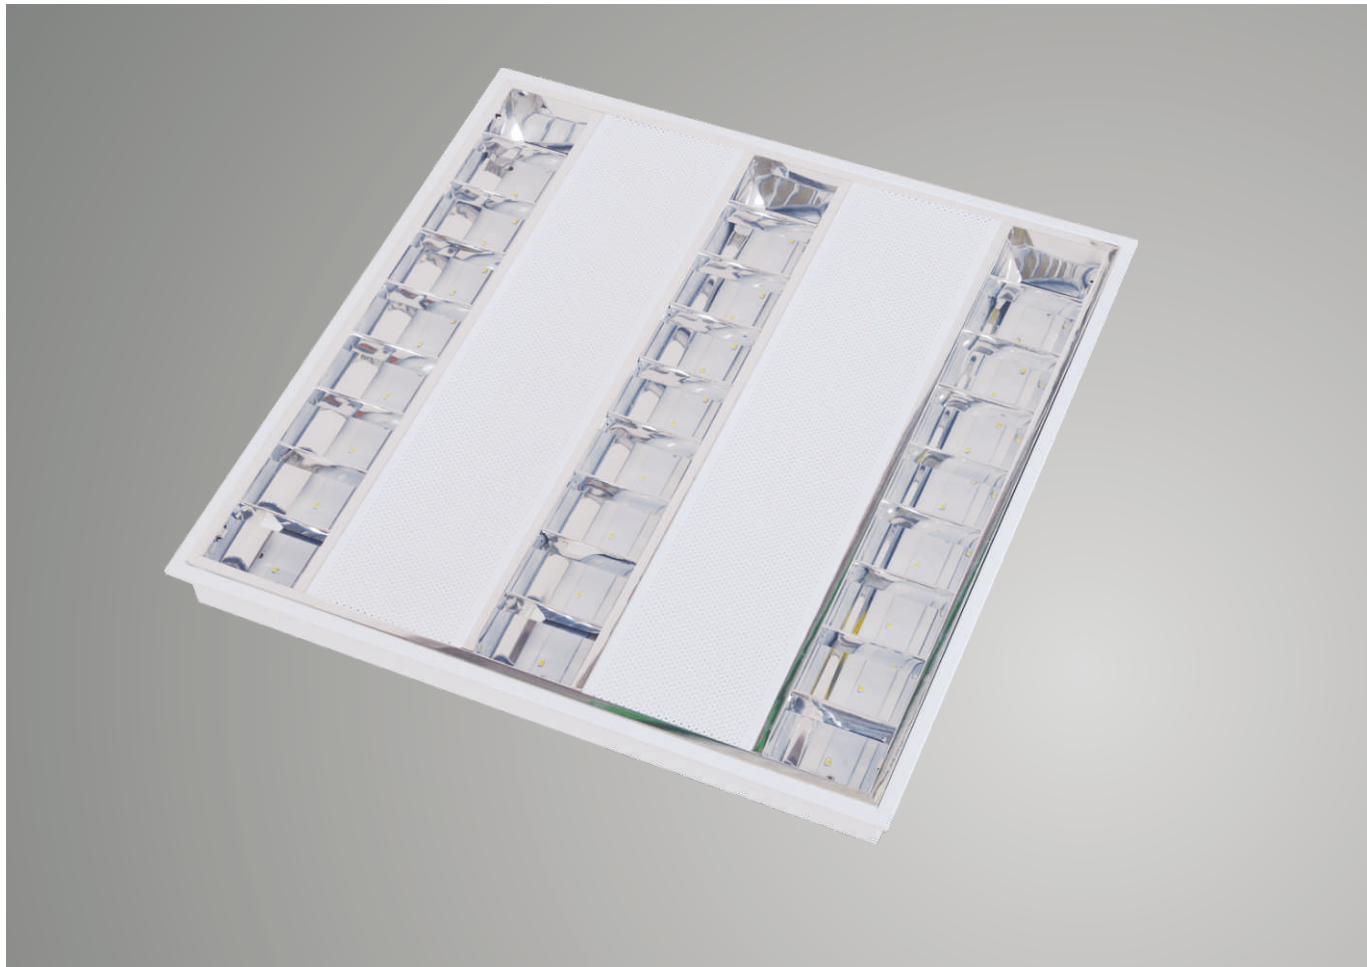

型号 Model	规格 Spec	输入电压 Input Voltage(V)	流明 LM	色温C/T	显色指数 CRI(Ra)	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQT5214L	2x8W	85-265V	1800	2700-6500k	≥ 80	595X295X55	610X310X130	2
TQT5314L	3x8W		2650		≥ 80	595X595X55	610X610X130	2
TQT5414L	4x8W		3500		≥ 80	595X595X55	610X610X130	2
TQT5228L	2x16W		3500		≥ 80	1195X295x55	1210X310X130	2
TQT5328L	3x16W		5300		≥ 80	1195X595X55	1210X610X130	2
TQT5428L	4x16W		7000		≥ 80	1195X595X55	1210X610X130	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

Installation: Recessed and ceiling mounted with chain and line.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm


Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm

0.8mm pure copper wires.

Fixture size is adjustable as your special need

T5 吸顶式荧光格栅灯

T5 SURFACED LOUVER FITTING

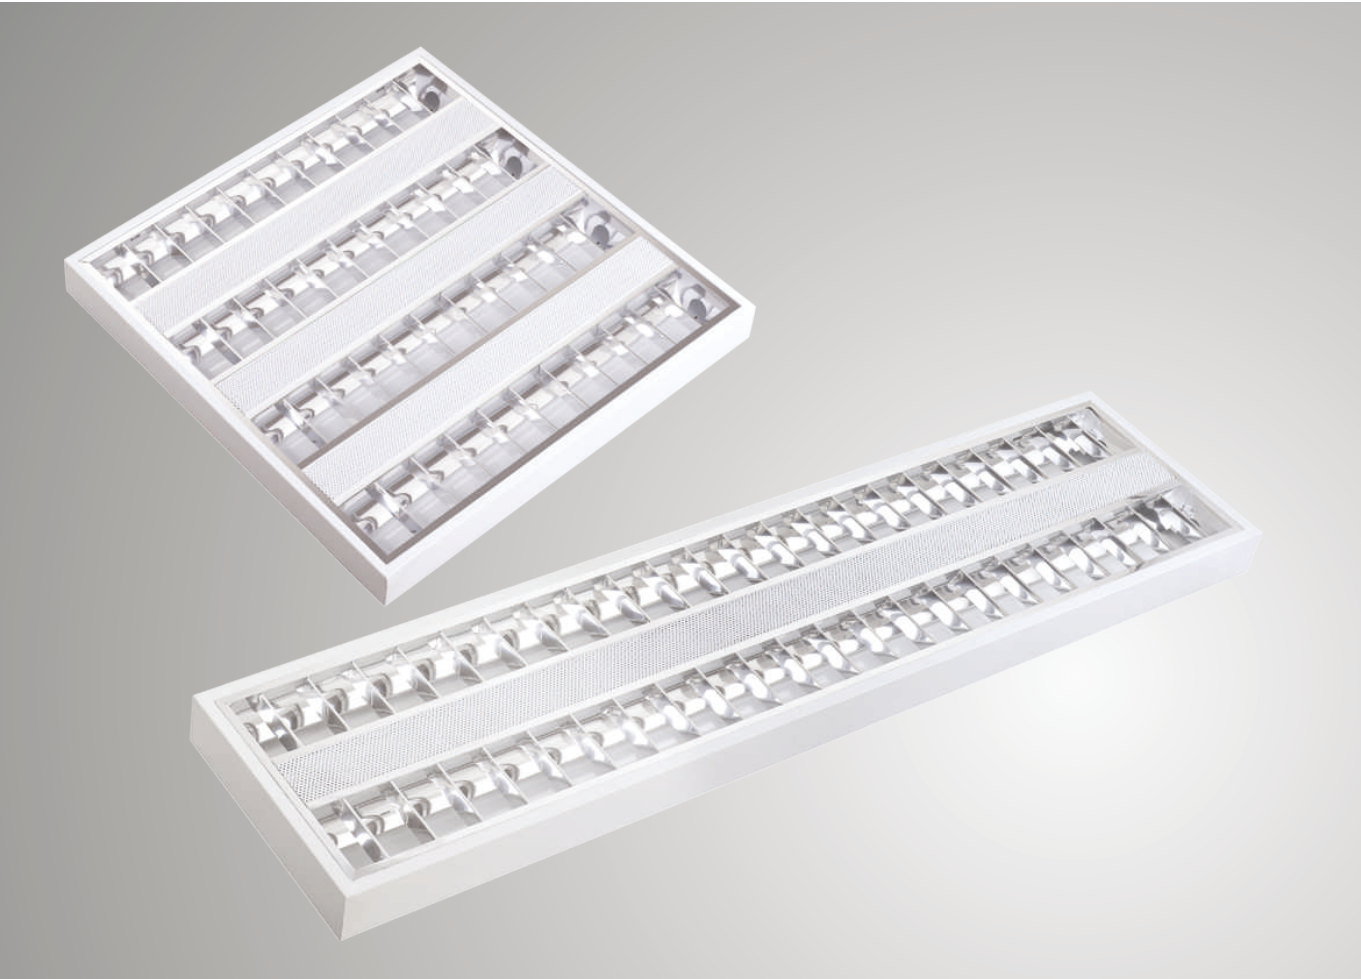

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQT5214(B)	2x14W	595X295X55	610X310X130	2
TQT5314(B)	3x14W	595X595X55	610X610X130	2
TQT5414(B)	4X14W	595X595X55	610X610X130	2
TQT5228(B)	2x28W	1195X295x55	1210X310X130	2
TQT5328(B)	3x28W	1195X595X55	1210X610X130	2
TQT5428(B)	4x28W	1195X595X55	1210X610X130	2
TQT5235(B)	2x35W	1495X295X55	1510X310X130	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：吸顶式

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.
Installation: Surfaced mounted.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm


Lampholder quality for option
PC/ABS lampholder

Cable material for option
Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

T5 吸顶式荧光格栅灯

T5 SURFACED LOUVER FITTING

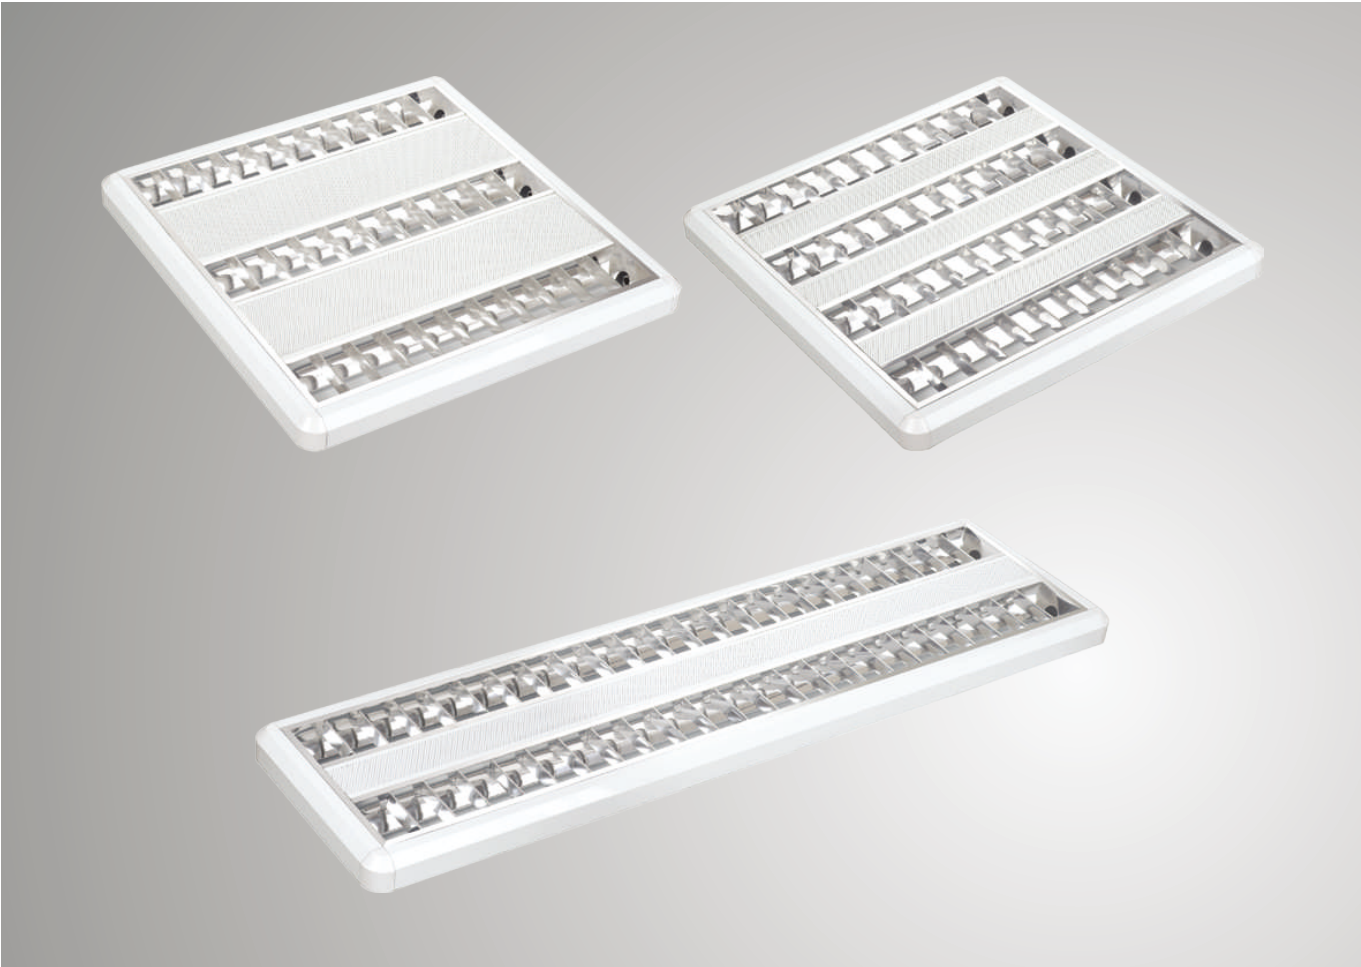

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQT5214(C)	2x14W	630X330X58	645X345X130	2
TQT5314(C)	3x14W	630X630X58	645X645X130	2
TQT5414(C)	4X14W	630X630X58	645X645X130	2
TQT5228(C)	2x28W	1230X330x58	1245X345X130	2
TQT5328(C)	3x28W	1230X630X58	1245X645X130	2
TQT5428(C)	4x28W	1230X630X58	1245X645X130	2
TQT5235(C)	2x35W	1530X330X58	1540X345X130	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：吸顶式

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.
Installation: Surfaced mounted.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm


Lampholder quality for option
PC/ABS lampholder

Cable material for option
Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

T8/T5 乳白棱晶灯

T8/T5 OPAL/ PRISMATIC COVER

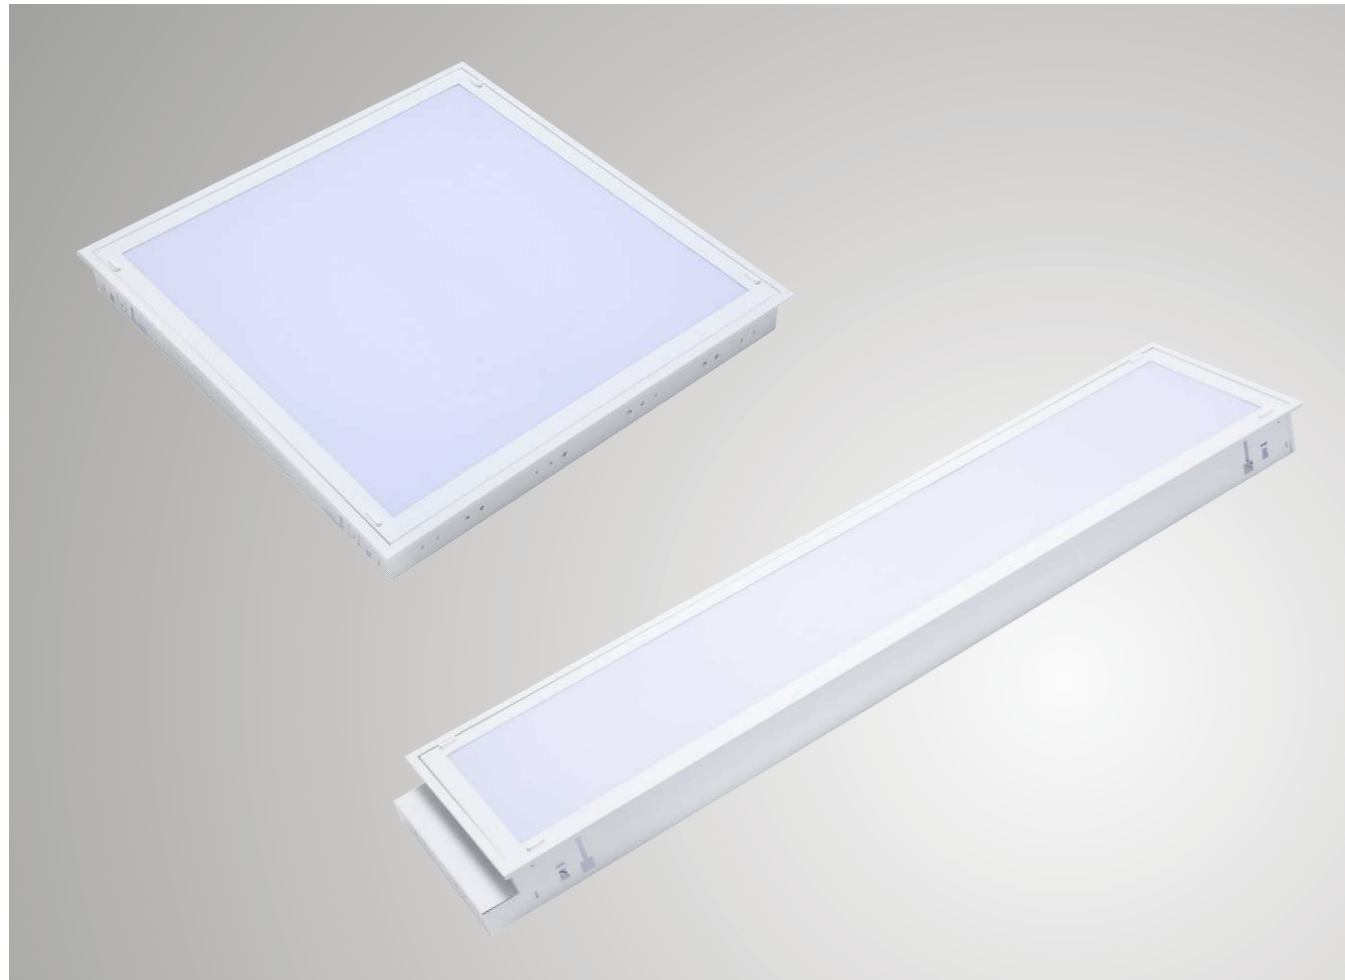

T8 FLURESCENT ITEMS

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRP8218	2X18W	595X295X75	635X315X170	2
TQRP8318	3X18W	595X595X75	635X615X170	2
TQRP8418	4X18W	595X595X75	635X615X170	2
TQRP8236	2X36W	1195X295x75	1248X315X170	2
TQRP8336	3X36W	1195X595X75	1248X615X170	2
TQRP8436	4X36W	1195X595X75	1248X615X170	2

材质说明：
灯盘材料：采用优质冷轧钢板制造，经去油，去锈处理，白色喷塑
遮光板：采用棱晶遮光板或乳白板，防尘、防潮、易清洁，透光度高
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

T5 FLURESCENT ITEMS

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRP5214	2X14W	595X295X 55	610X130X130	2
TQRP5314	3X14W	595X595X 55	610X610X130	2
TQRP5414	4X14W	595X595X 55	610X610X130	2
TQRP5228	2X28W	1195X295x55	1210X310X130	2
TQRP5328	3X28W	1195X595X55	1210X610X130	2
TQRP5428	4X28W	1195X595X55	1210X610X130	2

Specification:
Housing: high-quality steel or aluminium,surface is coated with white power. oil removed and rust removed .
Diffuser: PS prismatic cover or opar cover,dustproof,waterproof and easy to clean, high optical efficiency.
Ballast: electronic ballast or magnetic ballast.
Wire: copper wires or aluminium wires.

T8 嵌入式格栅灯

T8 RECESSED LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRT8218	2X18W	595X295X75	635X315X170	2
TQRT8318	3X18W	595X595X75	635X615X170	2
TQRT8418	4X18W	595X595X75	635X615X170	2
TQRT8236	2X36W	1195X295X75	1248X315X170	2
TQRT8336	3X36W	1195X595X75	1248X615X170	2
TQRT8436	4X36W	1195X595X75	1248X615X170	2
TQRT8258	2X58W	1495X295X75	1548X315X170	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.
Installation: Recessed and ceiling mounted with chain and line.

Your options:
Thickness of body after powder for option 0.4mm/0.45mm/0.5mm/0.55mm/0.65mm
Aluminum reflector thickness for option 0.22mm/0.25mm/0.3mm/0.35mm/0.4mm
Lampholder quality for option PC/ABS lampholder
Cable material for option Copper wires/mix wires/aluminum wires
Fixture size is adjustable as your special need

T8 嵌入式格栅灯
T8 RECESSED LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRT8218(A)	2X18W	595X295X75	635X315X170	2
TQRT8318(A)	3X18W	595X595X75	635X615X170	2
TQRT8418(A)	4X18W	595X595X75	635X615X170	2
TQRT8236(A)	2X36W	1195X295X75	1248X315X170	2
TQRT8336(A)	3X36W	1195X595X75	1248X615X170	2
TQRT8436(A)	4X36W	1195X595X75	1248X615X170	2
TQRT8258(A)	2X58W	1495X295X75	1548X315X170	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.
Installation: Recessed and ceiling mounted with chain and line.

Your options:
Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm
Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm
Lampholder quality for option
PC/ABS lampholder
Cable material for option
Copper wires/mix wires/aluminum wires
Fixture size is adjustable as your special need

T8 嵌入式格栅灯
T8 RECESSED LOUVER FITTING




型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRT8218(B)	2X18W	595X295X75	635X315X170	2
TQRT8318(B)	3X18W	595X595X75	635X615X170	2
TQRT8418(B)	4X18W	595X595X75	635X615X170	2
TQRT8236(B)	2X36W	1195X295X75	1248X315X170	2
TQRT8336(B)	3X36W	1195X595X75	1248X615X170	2
TQRT8436(B)	4X36W	1195X595X75	1248X615X170	2
TQRT8258(B)	2X58W	1495X295X75	1548X315X170	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.
Installation: Recessed and ceiling mounted with chain and line.

Your options:
Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm
Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm
Lampholder quality for option
PC/ABS lampholder
Cable material for option
Copper wires/mix wires/aluminum wires
Fixture size is adjustable as your special need

T8 嵌入式格栅灯
T8 RECESSED LOUVER FITTING

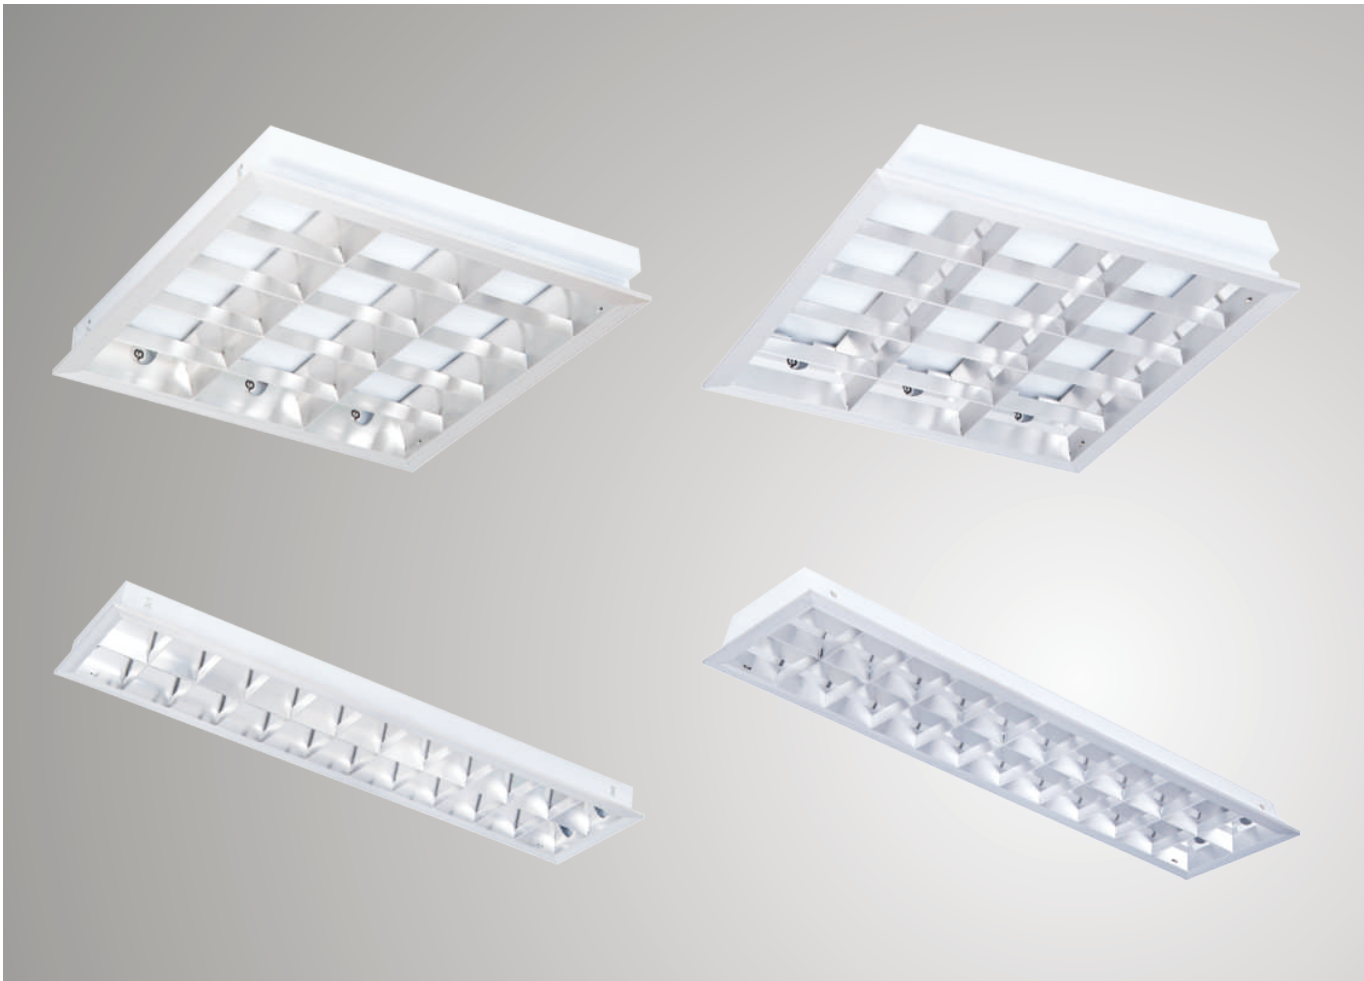

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRT8218(E)	2X18W	620X320X75	635X335X170	2
TQRT8318(E)	3X18W	620X620X75	635X635X170	2
TQRT8418(E)	4X18W	620X620X75	635X635X170	2
TQRT8236(E)	2X36W	1260X320X75	1275X335X170	2
TQRT8336(E)	3X36W	1260X620X75	1275X635X170	2
TQRT8436(E)	4X36W	1260X620X75	1275X635X170	2

适合场所：办公室，会议室，学校，医院，展厅，商场，银行
安装方式：嵌入式，吊顶

Main application: office, meeting room, shool, hospital, showroom, bank and department store.

Installation: Recessed and ceiling mounted with chain and line.

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRT8218(F)	2X18W	620X320X75	635X335X170	2
TQRT8318(F)	3X18W	620X620X75	635X635X170	2
TQRT8418(F)	4X18W	620X620X75	635X635X170	2
TQRT8236(F)	2X36W	1260X320X75	1275X335X170	2
TQRT8336(F)	3X36W	1260X620X75	1275X635X170	2
TQRT8436(F)	4X36W	1260X620X75	1275X635X170	2

Your options:
Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm
Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm
Lampholder quality for option
PC/ABS lampholder
Cable material for option
Copper wires/mix wires/aluminum wires
Fixture size is adjustable as your special nee

T8 IP65嵌入式荧光格栅灯
T8 IP65 RECESSED LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRI8218	2x18W	595X295X80	635X310X95	1
TQRI8318	3x18W	595X595X80	635X610X95	1
TQRI8418	4X18W	595X595X80	635X610X95	1
TQRI8236	2x36W	1195X295x80	1248X310X95	1
TQRI8336	3x36W	1195X595X80	1248X610X95	1
TQRI8436	4x36W	1195X595X80	1248X610X95	1

适合场所：隧道 停车场 油田 化工厂 制药厂等
安装方式：嵌入式

Main application: office, tunnel, parking place, oil field, chemical plant, pharmaceutical plant and so on.

Installation: Recessed mounted.

Your options:
Thickness of body after powder for option
0.65mm/0.95mm
Aluminum reflector thickness for option
0.3mm/0.35mm/0.4mm
Lampholder quality for option
PC/ABS lampholder
Cable material for option
Copper wires/mix wires/aluminum wires
Fixture size is adjustable as your special need

T8 吸顶式格栅灯

T8 SURFACED MOUNTED LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQST8218	2X18W	610X280X75	625X295X170	2
TQST8318	3X18W	610X610X75	625X625X170	2
TQST8418	4X18W	610X610X75	625X625X170	2
TQSD8236	2X36W	1220X280X75	1235X295X170	2
TQST8336	3X36W	1220X610X75	1235X625X170	2
TQST8436	4X36W	1220X610X75	1235X625X170	2
TQST8258	2X58W	1520X280X75	1535X625X170	2

适合场所：办公室，会议室，学校，展厅，商场，银行
安装方式：吸顶式，吊式

Main application: office, meeting room, shool, showroom, bank and department store.

Installation: Surface mounted and ceiling mounted with chain and line.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm

Lampholder quality for option
PC/ABS lampholder

Cable material for option
Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

T8 吸顶式格栅灯

T8 SURFACED LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQSD8218	2X18W	665X365X70	680X385X155	2
TQSD8318	3X18W	665X665X70	680X680X155	2
TQSD8418	4X18W	665X665X70	680X680X155	2
TQSD8236	2X36W	1275X365X70	1290X380X155	2
TQSD8336	3X36W	1275X665X70	1290X680X155	2
TQSD8436	4X36W	1275X665X70	1290X680X155	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：吸顶式，吊顶

Main application: office, meeting room, waiting hall, department store, supermarket, shool, and showroom.

Installation: Surfaced and ceiling mounted with chain and line.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
0.22mm/0.25mm/0.3mm/0.35mm/0.4mm

Lampholder quality for option
PC/ABS lampholder

Cable material for option
Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

吸顶式节能灯 SURFACED ENERGY-SAVING LOUVER FITTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQSC8436	4X36W	595X595X65	610X610X145	2
TQSC8336	3X36W	595X595X65	610X610X145	2
TQSC8236	2X36W	595X350X65	610X365X145	2

适合场所：办公室，会议室，学校，展厅，商场，银行
安装方式：吸顶式，吊式

Main application: office, meeting room, shool, showroom,
bank and department store.

Installation: Surface mounted and ceiling mounted with
chain and line.

Your options:

Thickness of body after powder for option
0.4mm/0.45mm/0.5mm/0.55mm/0.65mm

Aluminum reflector thickness for option
Well-polished Aluminum alloy frame

0.22mm/0.25mm/0.3mm/0.35mm/0.4mm

Lampholder quality for option

PC/ABS lampholder

Cable material for option

Copper wires/mix wires/aluminum wires

Fixture size is adjustable as your special need

间接照明 INDIRECT LIGHTING



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQH214	2x14W	595X595X90	610X610X195	2
TQH414	4x14W	595X595X90	610X610X195	2
TQH228	2X28W	1195X595X90	610X610X195	2
TQH236	2x36W	595X595X90	1210X610X195	2
TQH255	2x55W	595X595X90	610X610X195	2

适合场所：办公室，会议室，候机室，商场，超市，学校，展厅等
安装方式：嵌入式，吊顶

Main application: office, meeting room, waiting hall, department
store, supermarket, shool, and showroom.

Installation: Recessed and ceiling mounted with chain and line.

特点：

- 1.外形优雅时尚，极具现代感。
- 2.使用T5荧光灯管，高效节能。
- 3.采用二次间接放射原理，灯管柔和舒适。
- 4.安装维护方便，适合各式T型龙骨结构。

Features:

1. Fashional and Elegant modern design.
2. Equipped with T5 tube for fixture. it is high energy-saving efficient.
3. Adopt twice diffuse reflection therory .the lights is soft and comfortable without glaring.
4. Easily installed and maintained.

LED 壁灯系列
LED WALL LAMP SERIES




型号 Model	总功率 Total Wattage	长度(mm) Length	数量(pcs/ctn) Qty	包装尺寸 (cm) Packing Size	毛重/净重 (kg/ctn) G.W./N.W.
FT2016	8W	355x85x29	20	38x38x21.5	11.6/10.6
FT2016	13W	581x85x29	20	61x37.5x21.5	17/15.8
FT2016	21W	914x85x29	20	94x37.5x21.5	23.2/21.7
FT2016	28W	1214x85x29	12	124.5x23x22	18.4/16.6

Operating voltage:110-230v/50-60HZ
Bulit-in electronic ballast
Lamp:T5/G fluorescent tube
Materials:aluminium
With glass cover
Integral switch and power cord

型号 Model	总功率 Total Wattage	长度(mm) Length	数量(pcs/ctn) Qty	包装尺寸 (cm) Packing Size	毛重/净重 (kg/ctn) G.W./N.W.
FT2016 60LED	8W	355x85x29	20	38x38x21.5	11.6/10.6
FT2016 90LED	13W	581x85x29	20	61x37.5x21.5	17/15.8
FT2016 120LED	21W	914x85x29	20	94x37.5x21.5	23.2/21.7
FT2016 150LED	28W	1214x85x29	12	124.5x23x22	18.4/16.6

Operating voltage:110-230v/50-60HZ
Bulit-in 3528LED and electronic ballast
Materials:aluminium housing and glass cover
With switch,power cord and plug

LED壁灯
LED WALL LAMP SERIES

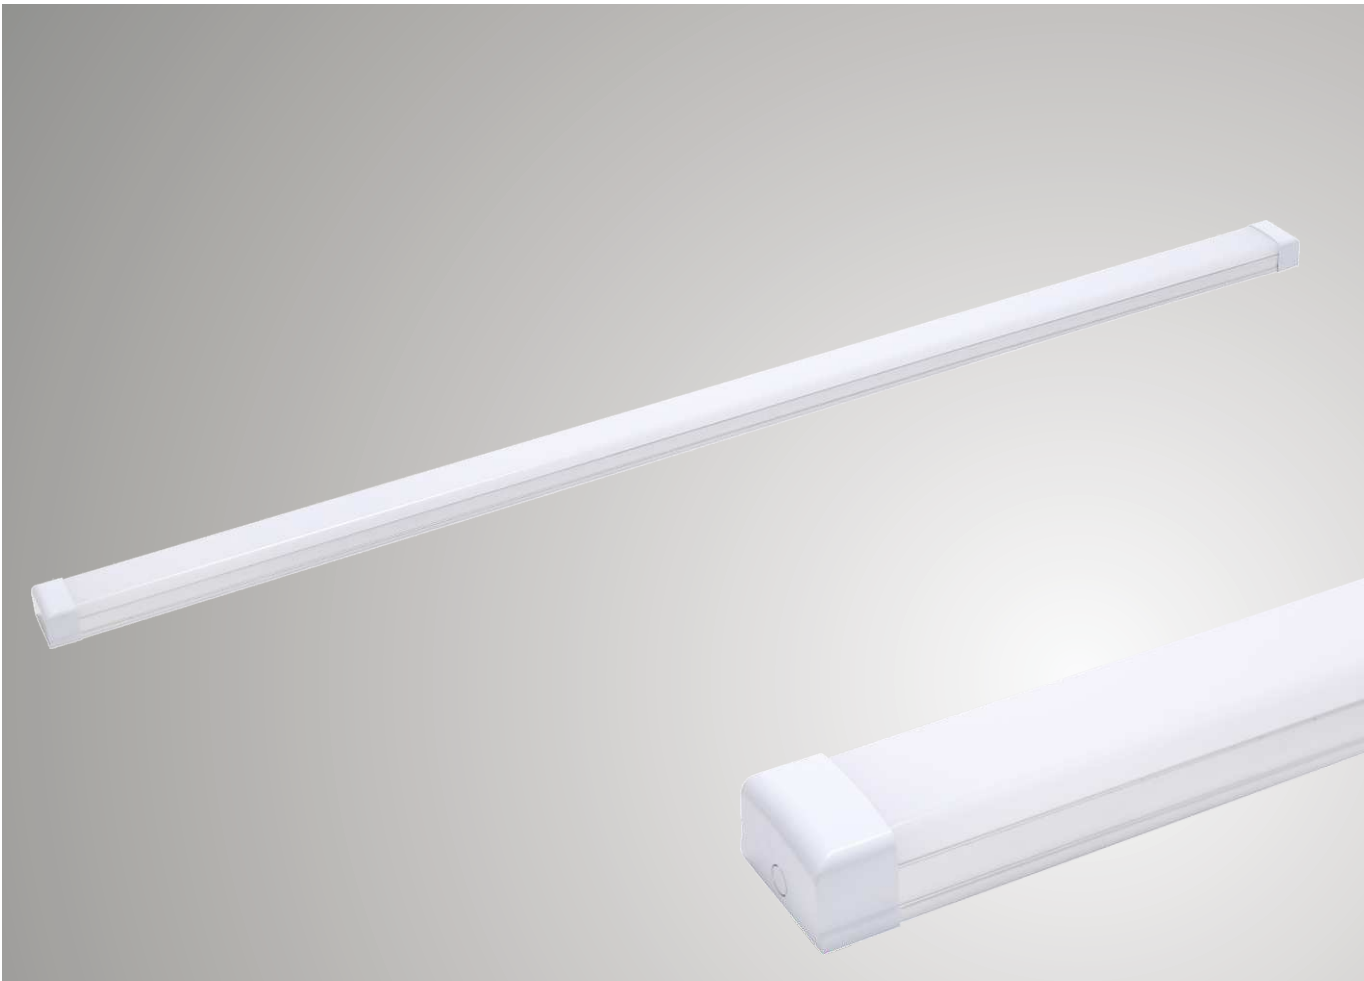

Model 型号	Input Voltage 输入电压	Power 功率	CRI 显色指数	CCT 色温	Size 产品尺寸	Installation 安装方式
FT2017 50LED	AC85-265V	50W	≥ 80	2700-7000K	L1500*W65*H40	CEILING 明装
FT2017 40LED	AC85-265V	40W	≥ 80	2700-7000K	L1200*W65*H40	CEILING 明装
FT2017 30LED	AC85-265V	30W	≥ 80	2700-7000K	L900*W65*H40	CEILING 明装
FT2017 20LED	AC85-265V	20W	≥ 80	2700-7000K	L600*W65*H40	CEILING 明装
FT2017 10LED	AC85-265V	10W	≥ 80	2700-7000K	L300*W65*H40	CEILING 明装

壁灯

WALL LAMP



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQB118	1X18W	624X96X42	635X270X220	10
TQB136	1X36W	1233X96X42	1258X280X220	10
TQB218	2X18W	624X131X45	635X270X300	10
TQB236	2X36W	1233X131X45	1258X280X300	10

适合场所：地下停车场，桥梁，厂房，公共停车场，走廊，厨房等
安装方式：吸顶式


Main application: Underground packing, bridge, factory building, corridor.
Installation: Surfaced or suspended.

材质说明：
灯盘材料：采用优质冷轧钢板材料
透光罩：采用PS材料制造，透光度强
镇流器：采用电子镇流器
电线：采用铜线或铝线
防护等级：IP20

Specification:
Housing: high quality material.
Diffuser: PS material High optical efficiency.
Ballast: electronic ballast.
Wire: copper wires or aluminium wires.
IP rating: IP20

壁灯

WALL LAMP

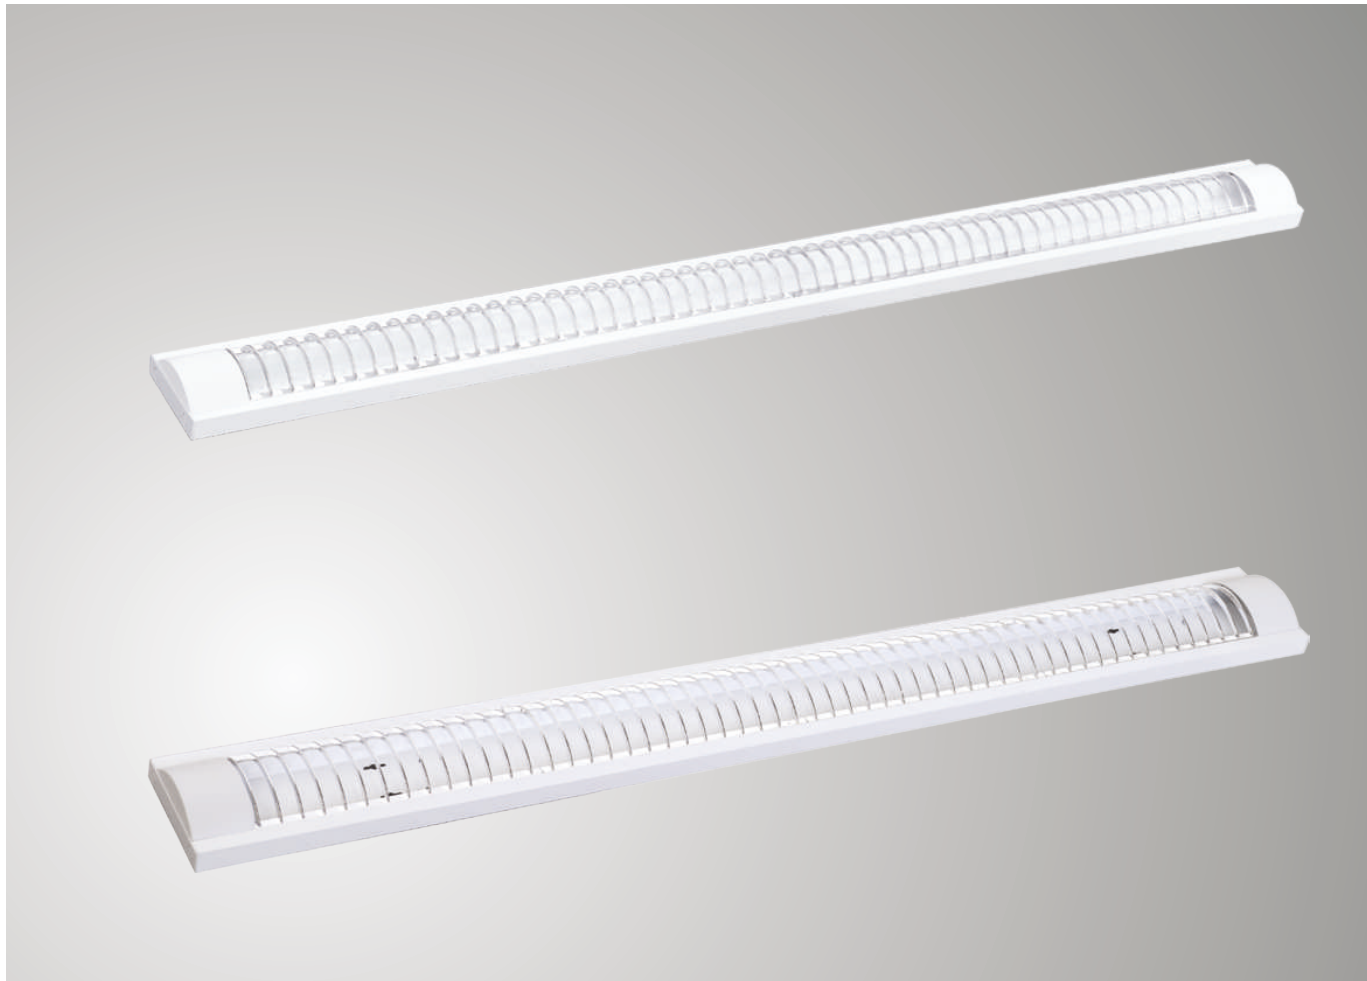

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQB118(A)	1X18W	624X96X42	635X270X220	10
TQB136(A)	1X36W	1233X96X42	1258X280X220	10
TQB218(A)	2X18W	624X131X45	635X270X300	10
TQB236(A)	2X36W	1233X131X45	1258X280X300	10

适合场所：地下停车场，桥梁，厂房，公共停车场，走廊，厨房等
安装方式：吸顶式

Main application: Underground packing, bridge, factory building, corridor.
Installation: Surfaced or suspended.

材质说明：
灯盘材料：采用优质冷轧钢板材料
透光罩：塑料格栅条
镇流器：采用电子镇流器
电线：采用铜线或铝线
防护等级：IP20

Specification:
Housing: high quality material.
Diffuser: Plastic grille reflector.
Ballast: electronic ballast.
Wire: copper wires or aluminium wires.
IP rating: IP20

T8 棱晶壁灯
WALL LAMP SERIES



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQRP8118(A)	1X18W	650X100X77	665X400X230	10
TQRP8218(A)	2X18W	650X170X77	665X400X195	10
TQRP8136(A)	1X36W	1260X100X77	1275X400X230	5
TQRP8236(A)	2X36W	1260X170X77	1275X400X195	5

适合场所：办公室，会议室，学校，医院，展厅，商场，银行
安装方式：吊顶

Main application: office, meetingroom, shool, hospital, showroom bank and department store.
Installation: ceiling mounted with chain and line.

材质说明：
支架材料：采用优质冷轧钢板制造，经去油，去锈处理，白色喷塑
遮光板：采用棱晶遮光板，防尘、防潮、易清洁，透光度高
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

Specification:
Housing: high-quality steel
Diffuser: PS / PMMAprismatic cover, dustproof, waterproof.
and easy to clean, high optical efficiency.
Ballast: electronic ballast or magnetic ballast.
Wire: copper wires or aluminium wires.

投光灯
LED FLOOD LAMP



TQ-GK03

型号 MODEL	TQ-GK03-10W	TQ-GK03-20W	TQ-GK03-30W	TQ-GK03-50W	TQ-GK03-70W
额定功率LED POWER	10W	20W	30W	50W	70 W
输入电压 VOLTAGE	AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V
光效 EFFICACY	70-80LM/W	70-80LM/W	70-80LM/W	70-80LM/W	70-80LM/W
色温 CCT	2700-7000K	2700-7000K	2700-7000K	2700-7000K	2700-7000K
光束角 BEAM ANGLE	90/120°	90/120°	90/120°	90>120°	90>120°
显色指数CRI (RA)	RA>70/RA>80	RA>70/RA>80	RA>70/RA>80	RA>70/RA>80	RA>70/RA>80
功率因素 POWER FACTOR	>0.90	>0.90	>0.90	RA>70/RA>80	RA>70/RA>80
寿命 LIFE SPAN	>50000HRS	>50000HRS	>50000HRS	>0.90	>0.90
环境温度	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃	>50000HRS	>50000HRS
AMBIENT TEMPERATURE				-40~℃+50℃	-40~℃+50℃

投光灯

LED FLOOD LAMP



型号 MODEL	TQ-GK02-10W	TQ-GK02-20W	TQ-GK02-30W	TQ-GK02-50W	TQ-GK02-70W
额定功率LED POWER	10W	20W	30W	50W	70 W
输入电压 VOLTAGE	AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V
光效 EFFICACY	70-80LM/W	70-80LM/W	70-80LM/W	70-80LM/W	70-80LM/W
色温 CCT	2700-7000K	2700-7000K	2700-7000K	2700-7000K	2700-7000K
光束角 BEAM ANGLE	90/120°	90/120°	90/120°	90>120°	90>120°
显色指数CRI (RA)	RA>70/RA>80	RA>70/RA>80	RA>70/RA>80	RA>70/RA>80	RA>70/RA>80
功率因素 POWER FACTOR	>0.90	>0.90	>0.90	>0.90	>0.90
寿命 LIFE SPAN	>50000HRS	>50000HRS	>50000HRS	>50000HRS	>50000HRS
环境温度	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃
AMBIENT TEMPERATURE					

投光灯

LED FLOOD LAMP



型号 MODEL	TQ-GK03-10W	TQ-GK03-20W	TQ-GK03-30W	TQ-GK03-50W	TQ-GK03-70W
额定功率LED POWER	30W	30W	30W	50W	70 W
输入电压 VOLTAGE	AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V	AC 85-265V
光效 EFFICACY	70-80LM/W	70-80LM/W	70-80LM/W	70-80LM/W	70-80LM/W
色温 CCT	2700-7000K	2700-7000K	2700-7000K	2700-7000K	2700-7000K
光束角 BEAM ANGLE	90/120°	90/120°	90/120°	90>120°	90>120°
显色指数CRI (RA)	RA>70	RA>70	RA>70	RA>70	RA>70
功率因素 POWER FACTOR	>0.90	>0.90	>0.90	>0.90	>0.90
寿命 LIFE SPAN	>50000HRS	>50000HRS	>50000HRS	>50000HRS	>50000HRS
环境温度	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃	-40~℃+50℃
AMBIENT TEMPERATURE					

工矿灯
LED HIGH BAY



TQ-GK00-A

MODEL 型号	Power 功率	Voltage 电压	Lampholder 灯头	CCT 色温	LM 光通	SMD 灯珠型号	QTY 珠数	SIZE 尺寸
TQ-GK10-A	10W	220-240v	E27/E40	3000K/6500K	1000	2835	50	Φ210*H150
TQ-GK20-A	20W	220-240v	E27/E40	3000K/6500K	1700	2835	100	Φ210*H150
TQ-GK30-A	30W	220-240v	E27/E40	3000K/6500K	2500	2835	150	Φ300*H150
TQ-GK50-A	50W	220-240v	E27/E40	3000K/6500K	4200	2835	230	Φ300*H150



TQ-GK410

MODEL 型号	LUMINOUS FLUX(LMS) 光通量	CCT 色温	CIR 显指	VOLTAGE(V) 电压	IP	PF	LED	BEAN ANGLE 发光角度	LIGHTING ZIE (MM) 尺寸
TQ-GK410-30W	2250-2400	2700-6500K	Ra>70	120-270v	Ip54	0.9	COB/EPISTAR	60°/90° /120°	Φ410*H270
TQ-LGK410-50W	3750-4000	2700-6500K	Ra>70	120-270v	IP54	0.9	COB/EPISTAR	60°/90° /120°	Φ410*H285
TQ-LGK410-80W	6000-6400	2700-6500K	Ra>70	120-270v	IP54	0.9	COB/EPISTAR	60°/90° /120°	Φ410*H351
TQ-LGK410-100W	7500-8000	2700-6500K	Ra>70	120-280v	IP54	0.9	COB/EPISTAR	60°/90° /120°	Φ500*H427
TQ-LGK500-120W	9000-9600	2700-6500K	Ra>70	120-280v	IP54	0.9	COB/EPISTAR	60°/90° /120°	Φ500*H370
TQ-LGK500-150W	11250-12000	2700-6500K	Ra>70	120-280v	IP54	0.9	COB/EPISTAR	60°/90° /120°	Φ500*H430
TQ-LGK500-180W	13500-14400	2700-6500K	Ra>70	120-280v	IP54	0.9	COB/EPISTAR	60°/90° /120°	Φ500*H490
TQ-LGK500-210W	15750-16800	2700-6500K	Ra>70	120-280v	Ip54	0.9	COB/EPISTAR	60°/90° /120°	Φ500*H510



TQ-LGK02

MODEL 型号	LUMINOUS FLUX(LMS) 光通量	CCT 色温	CIR 显指	VOLTAGE(V) 电压	IP	PF	LED	BEAN ANGLE 发光角度	LIGHTING ZIE (MM) 尺寸
TQ-LGK02-30W	2400±10%	2700-6500K	Ra>70	120-270v	Ip54	0.9	SMD5730/San'AN	60°/90° /120°	Φ280*H290
TQ-LGK02-50W	4000±10%	2700-6500K	Ra>70	120-270v	IP54	0.9	SMD5730/San'AN	60°/90° /120°	Φ365*H300
TQ-LGK02-70W	5600±10%	2700-6500K	Ra>70	120-270v	IP54	0.9	SMD5730/San'AN	60°/90° /120°	Φ365*H320



T5/T8三防灯
T5/T8 WATER-PROOF LAMP



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQWP5114	1X14W	608X60X75	640X285X220	12
TQWP5214	2X14W	608X100X75	640X285X230	8
TQWP5121	1X21W	908X60X75	925X245X225	12
TQWP5221	2X21W	908X100X75	925X206X230	8
TQWP5128	1X28W	1208X60X75	1123X285X220	12
TQWP5228	2X28W	1208X100X75	1230X285X230	8
TQWP5135	1X35W	1508X60X75	1540X285X230	12
TQWP5235	2X35W	1508X100X75	1540X285X230	8


型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQWP8236(S)	2X36W	1260X118X90	1290X300X265	8

Main application: Underground parking, bridge, factory building, corridor and bathing room.
Installation: Surfaced or suspended.

Specification:
Housing: PC/ABS material.
Diffuser: PC/PSmaterial High optical efficiency.
Ballast: electronic ballast or magnetic ballast.
Wire: copper wires or aluminium wires.
IP rating: IP65

T8三防灯

T8 WATER-PROOF LAMP

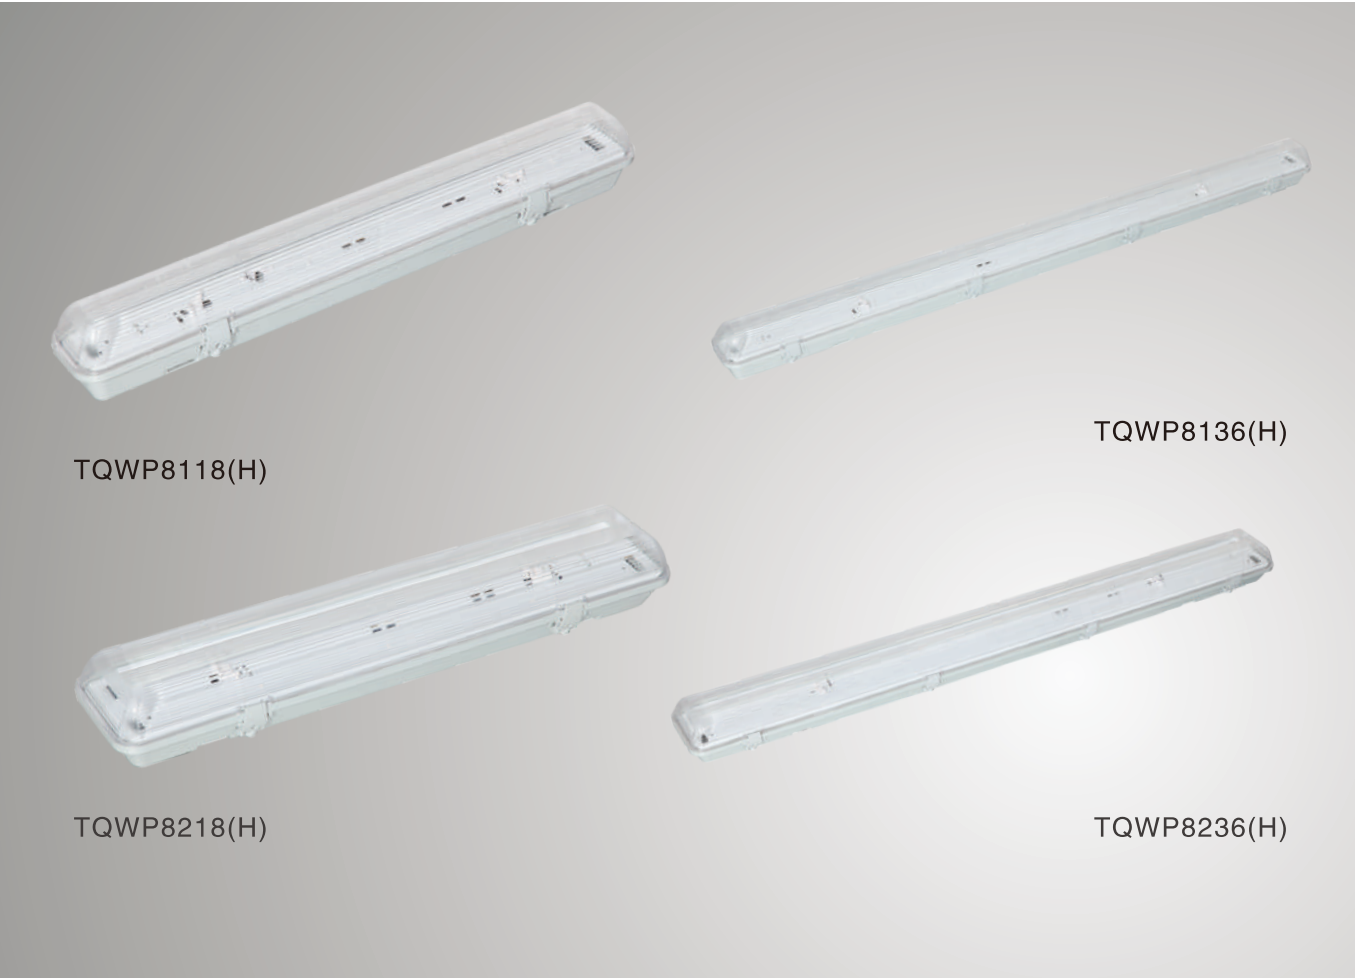

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQWP8118(H)	1X18W	658X88X97	675X290X210	8
TQWP8218(H)	2X18W	658X130X97	675X290X285	8
TQWP8136(H)	1X36W	1266X88X97	1280X290X210	8
TQWP8236(H)	2X36W	1266X130X97	1280X290X285	8

适合场所：地下停车场，桥梁，厂房，公共停车场，走廊，厨房，浴室等
安装方式：吸顶式吊装式


材质说明：
灯盘材料：采用PC或ABS材料
透光罩：采用PC或PS材料制造，透光度强
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线
防护等级：IP65

Main application: Underground parking, bridge, factory building, corridor and bathing room.
Installation: Surfaced or suspended.

Specification:
Housing: PC/ABS material.
Diffuser: PC/PSmaterial High optical efficiency.
Ballast: electronic ballast or magnetic ballast.
Wire: copper wires or aluminium wires.
IP rating: IP65

T8 三防灯

T8 WATER-PROOF LAMP

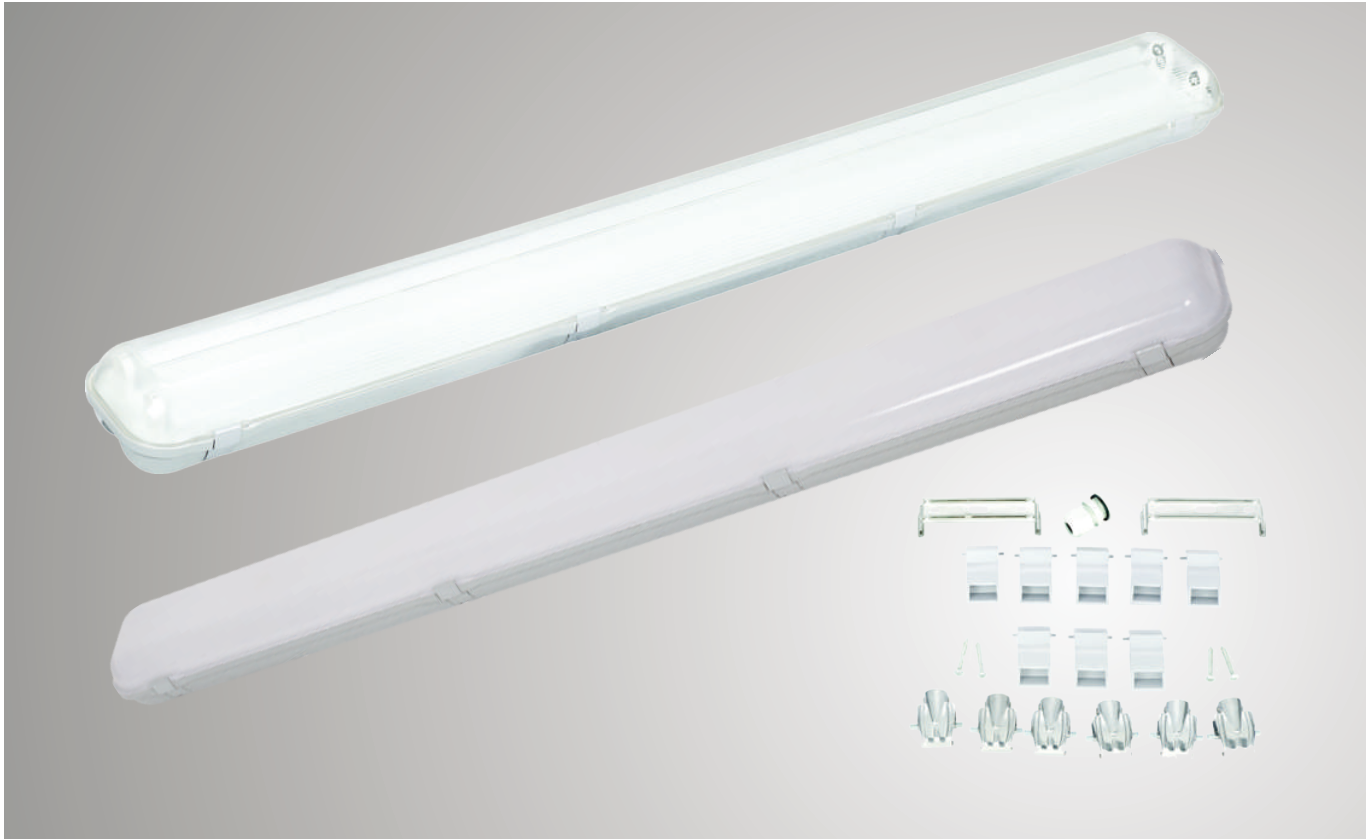

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQWP8118(O)	1X18W	662X81X93	690X370X210	10
TQWP8218(O)	2X18W	662X130X93	690X230X295	6
TQWP8136(O)	1X36W	1270X81X93	1290X295X210	8
TQWP8236(O)	2X36W	1270X130X93	1290X225X295	6
TQWP8158(O)	1X58W	1562X81X93	1580X300X215	8
TQWP8258(O)	2X58W	1562X130X93	1580X300X160	4

适合场所：地下停车场，桥梁，厂房，公共停车场，走廊，厨房，浴室等
安装方式：吸顶式吊装式

材质说明：
灯盘材料：采用PC或ABS
透光罩：采用PC或PS
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线
防护等级：IP65

Main application: Underground parking, bridge, factory building, corridor and bathing room.
Installation: Surfaced or suspended.

Specification:
Housing: PC/ABS material.
Diffuser: PC/PSmaterial High optical efficiency.
Ballast: electronic ballast or magnetic ballast.
Wire: copper wires or aluminium wires.
IP rating: IP65

TQ2-1 支架灯

TQ2-1 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ2-1818	T818W	625x120x60	640x215x180	10
TQ2-1830	T830W	930x120x60	945x215x180	10
TQ2-1836	T836W	1235x120x60	1250x215x180	10
TQ2-1858	T858W	1540x120x60	1555x215x180	10

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

适合场所：工厂，超市，大卖场，餐厅，停车场，学校，
医院，仓库
安装方式：吸顶，吊杆

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

TQ2-2 支架灯

TQ2-2 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ2-2818	T818W	625x170x70	640x215x180	5
TQ2-2830	T830W	930x170x70	945x215x180	5
TQ2-2836	T836W	1235x170x70	1250x215x180	5
TQ2-2858	T858W	1540x170x70	1555x215x180	5

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

Main application: Factory, supermarket, hypermarket,
hotel, parking area shooland ware house.
Installation: Surfaced or suspended.


Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.

TQ1-1 支架灯

TQ1-1 FLUORESENT FIXTURE

TQ1-2B 支架灯

TQ1-2B FLUORESENT FIXTURE

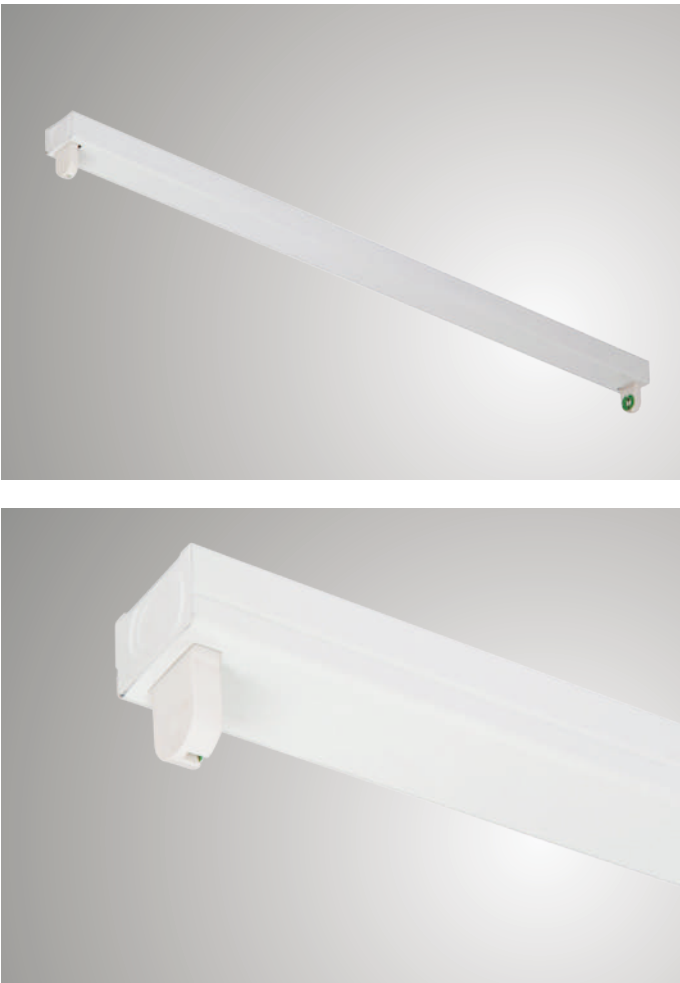

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ1-1818	T818W	625x35x40	640x223x88	8
TQ1-1830	T830W	930x35x40	950x223x88	8
TQ1-1836	T836W	1235x35x40	1253x223x88	8
TQ1-1858	T858W	1540x35x40	1555x223x88	8

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

适合场所：工厂，超市，大卖场，餐厅，停车场，学校，
医院，仓库
安装方式：吸顶，吊杆

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/cnt
TQ1-2B818	T818W	625x35x40	640x223x88	8
TQ1-2B830	T830W	930x35x40	950x223x88	8
TQ1-2B836	T836W	1235x35x40	1253x223x88	8
TQ1-2B858	T858W	1540x35x40	1555x223x88	8

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

Main application: Factory, supermarket, hotel, parking area
shooland ware house.
Installation: Surfaced or suspended.

Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.

TQA1-1 支架灯

TQA1-1 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQA1-1818	T818W	625X55X40	640X235X95	8
TQA1-1830	T830W	928X55X40	950X235X95	8
TQA1-1836	T836W	1235X55X40	1250X235X95	8
TQA1-1858	T858W	1535X55X40	1555X235X95	8

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

适合场所：工厂，超市，大卖场，餐厅，停车场，学校，
医院，仓库
安装方式：吸顶，吊杆

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

TQA1-2 支架灯

TQA1-2 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQA1-2818	T818W	625X55X40	640X235X95	8
TQA1-2830	T830W	928X55X40	950X235X95	8
TQA1-2836	T836W	1235X55X40	1250X235X95	8
TQA1-2858	T858W	1535X55X40	1555X235X95	8

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

Main application: Factory, supermarket, hotel, parking area
shooland ware house.
Installation: Surfaced or suspended.

Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.

TQ1-2 支架灯

TQ1-2FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ99-1818	T818W	620X50X40	650X220X150	12
TQ99-1830	T830W	925X50X40	950X220X150	12
TQ99-1836	T836W	1230X50X40	1245X220X150	12
TQ99-1858	T858W	1535x50x40	1550X250X130	12

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

适合场所：工厂，超市，大卖场，餐厅，停车场，学校，
医院，仓库
安装方式：吸顶，吊杆

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ99-2818	T818W	620X50X40	650X220X150	12
TQ99-2830	T830W	925X50X40	950X220X150	12
TQ99-2836	T836W	1230X50X40	1245X220X150	12
TQ99-2858	T858W	1535x50x40	1550X250X130	12

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

Main application: Factory, supermarket, hotel, parking area
shooland ware house.
Installation: Surfaced or suspended.

Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.

TQ99-6 支架灯
TQ99-6 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ99-6818	T818W	620X170X90	640X220X130	6
TQ99-6830	T830W	925X170X90	940X220X130	6
TQ99-6836	T836W	1230X170X90	1245X220X130	6
TQ99-6858	T858W	1535X170X90	1550X220X130	6

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

适合场所：工厂，超市，大卖场，餐厅，停车场，学校，
医院，仓库
安装方式：吸顶，吊杆

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

TQ99-7 支架灯
TQ99-7 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ99-7818	T818W	620X170X90	640X220X130	6
TQ99-7830	T830W	925X170X90	940X220X130	6
TQ99-7836	T836W	1230X170X90	1245X220X130	6
TQ99-7858	T858W	1535X170X90	1550X220X130	6

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

Main application: Factory, supermarket, hotel, parking area
shooland ware house.
Installation: Surfaced or suspended.

Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.

TQ3011支架灯
TQ3011FLUORESENT FIXTURE




型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ301118	T818W	670X35X65	685X210X125	9
TQ301130	T830W	975X35X65	990X210X125	9
TQ301136	T836W	1280X35X65	1295X210X125	9
TQ301158	T858W	1585X35X65	1600X210X125	9

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

适合场所：工厂，超市，大卖场，餐厅，停车场，学校，
医院，仓库
安装方式：吸顶

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子或电感镇流器
电线：采用铜线或铝线

TQ3012支架灯
TQ3012FLUORESNET FIXTURE

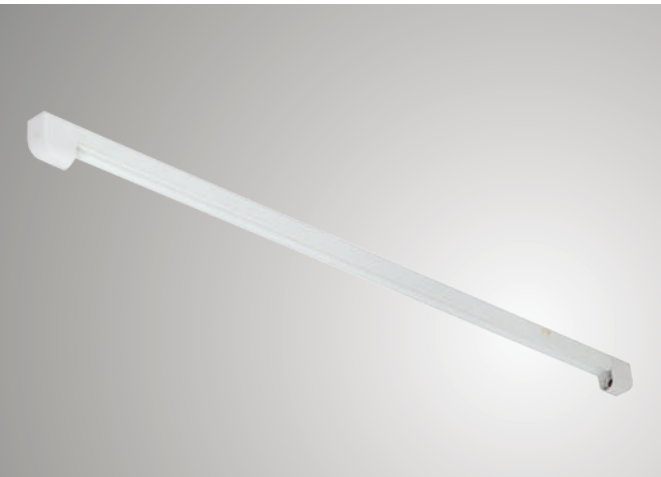

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ301218	T818W	670X35X65	685X210X125	9
TQ301230	T830W	975X35X65	990X210X125	9
TQ301236	T836W	1280X35X65	1295X210X125	9
TQ301258	T858W	1585X35X65	1600X210X125	9

备注：可按客户特殊要求制造
Remark: In compliance with customer special requirements

Main application: Factory, supermarket, hotel, parking area
shooland ware house.
Installation: Surfaced or suspended.

Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.

T5支架灯
T5 FLUORESENT FIXTURE



型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ5-A128	T5A28W	1175X28X27	1195X170X165	25
TQ5-A114	T5A14W	575X28X27	595X171X165	25
TQ5-A228	T5A28W	1175X35X37	1195X167X215	20
TQ5-A214	T5A14W	575X35X37	595X167X215	20

材质说明：
灯体材质：采用优质冷轧钢板
镇流器：采用电子镇流器
电线：采用铜线或铝线
安装方式：吸顶

Specification:
Diffuser: highquality steel.
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.
Installation: Surfaced.

型号 Model	规格 Spec	产品尺寸(mm) lighting	包装尺寸(mm) Packing	包装数量 set/ctn
TQ5-B128	T5B28W	1170X47X33	1190X265X375	50
TQ5-B114	T5B14W	570X47X33	590X265X375	50
TQ5-B228	T5B28W	1170X73X40	1190X395X235	25
TQ5-B214	T5B14W	570X73X40	590X395X235	25


材质说明：
灯体材质：采用优质铝合金
镇流器：采用电子镇流器
电线：采用铜线或铝线
安装方式：吸顶

Specification:
Diffuser: highquality aluminum alloy .
Ballast: electronic or magnetic ballast.
Wire: copper wires or aluminium wires.
Installation: Surfaced.

LED
LED BULB



MODEL 型号	Power 功率	CCT 色温	Voltage 电压	SMD 灯珠型号	QTY 珠数	SIZE 尺寸
TQ-QP03-SLA	3W	2700K/6400K	110-220v	2835	12	Φ 50mm
TQ-QP05-SLA	5W	2700K/6400K	110-220v	2835	22	Φ 60mm
TQ-QP07-SLA	7W	2700K/6400K	110-220v	2835	30	Φ 70mm
TQ-QP09-SLA	9W	2700K/6400K	110-220v	2835	40	Φ 80mm
TQ-QP012-SLA	12W	2700K/6400K	110-220v	2835	48	Φ 95mm




MODEL 型号	Power 功率	CCT 色温	Voltage 电压	SMD 灯珠型号	QTY 珠数	SIZE 尺寸
TQ-QP03-SLB	3W	2700K/6400K	110-220v	2835	12	Φ 50mm
TQ-QP05-SLB	5W	2700K/6400K	110-220v	2835	22	Φ 60mm
TQ-QP07-SLB	7W	2700K/6400K	110-220v	2835	30	Φ 70mm
TQ-QP09-SLB	9W	2700K/6400K	110-220v	2835	40	Φ 80mm



MODEL 型号	Power 功率	CCT 色温	Voltage 电压	SMD 灯珠型号	QTY 珠数	SIZE 尺寸
TQ-QP03-SLC	3W	2700V/6400V	110V/220V	2835	12	Φ 50mm
TQ-QP05-SLC	5W	2700V/6400V	110V/220V	2835	22	Φ 60mm
TQ-QP07-SLC	7W	2700V/6400V	110V/220V	2835	30	Φ 70mm
TQ-QP09-SLC	9W	2700V/6400V	110V/220V	2835	40	Φ 80mm
TQ-QP12-SLC	12W	2700V/6400V	110V/220V	2835	48	Φ 95mm



MODEL 型号	Power 功率	CCT 色温	Voltage 电压	SMD 灯珠型号	QTY 珠数	SIZE 尺寸
TQ-QP03-SLD	3W	2700V/6400V	110V/220V	2835	12	Φ 50mm
TQ-QP05-SLD	5W	2700V/6400V	110V/220V	2835	22	Φ 60mm
TQ-QP07-SLD	7W	2700V/6400V	110V/220V	2835	30	Φ 70mm
TQ-QP09-SLD	9W	2700V/6400V	110V/220V	2835	40	Φ 80mm
TQ-QP12-SLD	12W	2700V/6400V	110V/220V	2835	48	Φ 95mm



MODEL 型号	Power 功率	CCT 色温	Voltage 电压	LM 光通亮	SMD 灯珠型号	QTY 珠数	SIZE 尺寸
TQ-QP03-SBL	3W	2700V/6400V	110V/220V	180-220	5730	6PCS	Φ 50*H90
TQ-QP05-SBL	5W	2700V/6400V	110V/220V	360-400	5730	10PCS	Φ 60*H110
TQ-QP07-SBL	7W	2700V/6400V	110V/220V	520-560	5730	14PCS	Φ 65*H115
TQ-QP09-SBL	9W	2700V/6400V	110V/220V	650-700	5730	18PCS	Φ 70*H125
TQ-QP12-SBL	12W	2700V/6400V	110V/220V	920-980	5730	24PCS	Φ 80*H138